NANKANG SINCE 1959

NANKANG RUBBER TIRE CORP., LTD.
Suite 608, No.136, Sec 3, Jen Ai Rd., Taipei City, Taiwan
TEL +886-2-27065137 FAX +886-2-27065174

www.nankang-tyre.com

2021

PRODUCT CATALOGUE

The Nankang Story

Over 55 Years of Industrious Work, all Dedicated to Motoring Safety

Nankang is proud of our quality products produced over the years. Yet we never cease to pursue excellence in both our R&D and manufacturing processes.

Nankang Rubber Tire's heritage runs deep; having the longest history among the tire manufacturers in Taiwan. For over 55 years, guided by our corporate motto, "Integrity, Pragmatism, and Innovation", we have persisted in creating performance and growth. In response to increasingly discerning market demands, we have striving aggressively towards our goals of "product innovation with R&D, differentiation from competition, product quality upgrading, customer satisfaction, after-sale service and professional management," in order to offer more and more innovative products.

Over 55 Years of Honor and Recognition, Winning Numerous Awards with our Effort in R&D

Over the past 55 years, our continuous efforts in keeping up with the advancement of technology and product quality control have proven to be fruitful not only in developing many innovative and durable products, but also bringing us numerous global awards in Quality Assurance.

Over 55 Years of Business Splendor, High Time to Turn a New Page

Nankang Rubber Tire's corporate logo has been in use for more than 55 years. Facing increasingly fierce competition from the global tire industry and considering the trend of corporate reforms, in 2010 Nankang embarked upon a review of its corporate identity system "CIS". Through this new project, we aim to build a new Nankang Tire brand image, of world standard. Being able to keep up with the times, the company will proudly move on to the next splendid century of its corporate history.

Mastering the Colorful World Stage with a New CIS

A passionate yet stead fast symbol, the , represents Nankang Rubber Tire's sustainable business philosophy, and her corporate spirit. Care for the customer is always of paramount importance.

The CIS employs a duo color combination of red and black.The Red color expresses Nankang's corporate spirit of high passion, respect for customers, energy and vitality.The Black color highlights the strength and stability of her tire business and represents an image of generosity, grandeur, professionalism and trustworthiness.

Whether it be for cruising the highway, striding over an icescape, or conquering a dilapidated off-road track, for over 60 years, Nankang Tire has offered drivers safe innovative motoring, with a spirit as unbreakable as the tires she manufactures.

From her humble beginnings, Nankang has advanced across five continents, and covered more than 100 countries globally. From tire industry leader in Taiwan, Nankang is now steadily driving her way onto the global stage with unlimited opportunity.

Milestone



1959 NANKANG Rubber Tire Corporation Ltd. was established, the 1st tires manufacturer in Taiwan.



1974 The first Taiwanese tire maker which successfully developed the steel belted radial tires.

1973 Hsin-Fung (Taiwan) Plant was established.

1976 Development of all steel wires radial tires for trucks and buses.

1980 Honored with the award of Quality Control. Group by R.O.C. Society of Quality Control.

1984 E-Mark certification (the certificate for products to export to Europe)

1990 Hsin-Fung plant started to produce radial tires for passenger sedan.

1991 Obtained ISO-9001 certificate from DNV quality approval system.

1994 ISO/TS 16949 certificate was awarded.

1997 High performance studless snow tires were successfully developed.

2001 SNI (Indonesia) and IN (Brazil) certificate received.

Photo Retrieved from CNA

2003 Production of PCR tires in Zhangjiagang Plant in China.

Photo Retrieved from CNA



2007 Successful development of high performance and fuel saving ECO series.

2008 NANKANG RRC laboratory was founded and accredited by TÜV SÜD, the first (and only) in Taiwan.

2009 Produced HA Oil free series product.

2010 Introduced high level Roadiac series product.

2011 Awarded 100 Taiwan TOP brands by Ministry of Economic Affairs, R.O.C.

TOP 100 TAIWAN BRANDS

Photo Retrieved from CNA

2012 Launched the NEW CIS. NANKANG has grown to become an influential and global company.

2014 NANKANG ECO-2+ was certificated by TÜV SÜD.

NANKANG AS-2+ was certificated by TÜV SÜD.

2015 NANKANG RRC laboratory was accredited by IDIADA.

2016 Run-flat tire AS-2+ ZPMS was successfully developed.

2018 NS2R won D1GP Japan Annual Champion.

2019 AR-1 is qualified to the Nurburgring contacted team: APEX for taxi drive

Nankang 60th anniversary

2020 Nankang AR-1 tyre OEM choice for Donkervoort D8 GTO-JD70.

Our Commitment to the Environment

Nankang realizes the fact that we are a part of the Earth's Eco system, and so we take pride in our responsibilty to provide a better environment for future generations. Our commitment is evident right throughout the manufacturing process. Our raw materials are formulated to lower pollution emissions. As such, our suppliers are required to provide raw materials which conform to all relevant internationally recognized environmental regulations.

Extended Tire Life for Better Value and a Better Environment

Extending the durability of tires not only creates higher economic value for drivers, but also reduces the impact of scrapped tires upon the environment. To achieve this, Nankang uses highly structured chemical agents to lessen tread wear, and unique additives designed to slow the tire aging process. High pressure-bearing materials are applied, to enable tires to be properly inflated. While value and safety are essential to customer satisfaction, product quality and performance are never compromised.

Conformity to Regulations with HA (High Aromatic)-Oil Free Formula for VOC Reduction

Nankang tire compounds are formulated to meet the European Union's regulations on environmental protection which came into force in 2010. HA-oil free compounds are used across the major portion of our product line. In addition, necessary measures are taken to reduce volatile organic compound (VOC) generation in our manufacturing, thus eliminating further pollution in the process.

Lower Rolling Resistance for Fuel Saving and Carbon Dioxide Emission

Fuel consumption and carbon dioxide emissions are direct functions of a tire's rolling resistance. Lowering rolling resistance is one of the top priorities for our product development. High dispersible silica and unique cross linking agents are applied in our formula to achieve the stable integration of natural, synthetic rubber and sillica, which leads to the advanced result of lower rolling resistance, less heat generation and better grip performance.

INDEX

The Nankang Story ---------- P.01-02
Milestone ---------- P.03-04
Our Commitment ---------- P.05-06

Sportnex

P.09-10 P.11-12 P.13-14 P.15-16

NK COMFORT

P.17-18 P.19-20 P.21 P.22

ECONEX

P.23-24 P.25-26

Studdable | Tread Life | Fuel Efficiency | Maximum Handling | Loading | Ultimate Grip | Handling | HA Oil Free | Wet Grip | Comfort | Low Noise | SILICA

Rollnex

P.27-28 P.29-30 P.31-32 P.33-34

P.35 P.36 P.36

NK VAN

P.37 P.38 P.39

TRUCK & BUS

P.40 P.41 P.42

Inch Up ---------- P.43-46
Safty ---------- P.47-48
European Tire / ETRTO Regulations ---------- P.49-50

TAIWAN EXCELLENCE

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

AS-2+

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Wet Grip | Handling





Benchmarking to the average performance of European , Japanese and Korea competitors, AS-2+ outperforms the average of its competitors by 4.3% in Aquaplaning Performance. Wet braking performance of AS-2+ is 14.9% higher than the testing tire.
· Channeling the standing water away more effectively.
· Braking through water at the higher speed and with more stable control.
· Offering extra tire grip and safety when it's raining.
Tested by TÜV SÜD Automotive in 2015
Tire size: 225/45ZR17 94W; Test Vehicle: VW Golf VII, VW Passat Variant
Test locations: ATP(D), FAKTmotion(D), TÜV SÜD PS (D), Report No. 713051806

AS-2+ Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
25'	20	**295/25ZR20**	95(XL)	Y	10.5	656	301	E	A	75	2
	20	**285/25ZR20**	93(XL)	Y	10.5	650	295	E	A	73	2
30'	21	**245/30ZR21**	91(XL)	Y	8.5	681	248	E	A	71	2
	21	**235/30ZR21**	91(XL)	Y	8.5	675	241	E	A	71	2
	20	**285/30ZR20**	99(XL)	Y	10	680	290	C	A	73	2
	20	**275/30ZR20**	97(XL)	Y	9.5	674	278	C	A	71	2
	20	**265/30ZR20**	94(XL)	Y	9.5	668	271	E	A	71	2
	20	**255/30ZR20**	92(XL)	Y	9	662	260	E	A	71	2
	20	**245/30ZR20**	90(XL)	Y	8.5	656	248	E	A	71	2
	19	**275/30ZR19**	96(XL)	Y	9.5	649	278	C	A	71	2
35'	22	**285/35ZR22**	106(XL)	W	10	759	290	C	A	71	1
	20	**315/35ZR20**	110(XL)	Y	11	728	320			N/A	
	20	**295/35ZR20**	105(XL)	Y	10.5	714	301	C	A	73	2
	20	**275/35ZR20**	102(XL)	Y	9.5	700	278			N/A	
	20	**265/35ZR20**	99(XL)	Y	9.5	694	271	C	A	71	2
	20	**255/35ZR20**	97(XL)	Y	9	686	260	C	A	71	2
	20	**245/35ZR20**	95(XL)	Y	8.5	680	248	C	A	71	2
	20	**225/35ZR20**	93(XL)	Y	8	666	230	E	A	71	2
	19	**285/35ZR19**	103(XL)	Y	10	683	290	E	A	71	1
	19	**275/35ZR19**	96	Y	9.5	675	278	C	A	71	2
	19	**275/35RF19**	96	Y	9.5	675	278	E	A	71	2
	19	**265/35ZR19**	98(XL)	Y	9.5	669	271	C	A	71	2
	19	**255/35ZR19**	96(XL)	Y	9	661	260	E	A	71	2
	19	**255/35RF19**	96(XL)	Y	9	661	260	E	A	71	2
	19	**245/35ZR19**	93(XL)	Y	8.5	655	248	C	A	71	2
	19	**235/35ZR19**	91(XL)	Y	8.5	647	241	E	A	71	2
	19	**225/35ZR19**	88(XL)	Y	8	641	230	C	A	71	2
	19	**225/35RF19**	88(XL)	Y	8	641	230	E	A	71	2
	18	**275/35ZR18**	99(XL)	Y	9.5	649	278	C	A	71	2
	18	**265/35ZR18**	97(XL)	Y	9.5	643	271	E	A	71	2
	18	**255/35ZR18**	94(XL)	Y	9	635	260	E	A	71	2
	18	**245/35ZR18**	92(XL)	Y	8.5	629	248	E	A	71	2
	18	**225/35ZR18**	87(XL)	Y	8	615	230	E	A	71	2
	17	**225/35ZR17**	86(XL)	Y	8	590	230	E	A	71	2

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
40'	20	**275/40ZR20**	106(XL)	Y	9.5	728	278			N/A	
	20	**255/40ZR20**	101(XL)	Y	9	712	260	C	A	71	2
	20	**245/40ZR20**	99(XL)	Y	8.5	704	248	E	A	71	2
	20	**245/40ZR20**	103(XL)	Y	8.5	704	248	C	A	71	2
	19	**275/40RF19**	101	Y	9.5	703	278			N/A	
	19	**245/40ZR19**	98(XL)	Y	8.5	679	248	C	A	71	2
	19	**245/40RF19**	98(XL)	Y	8.5	679	248	E	A	71	2
	19	**235/40ZR19**	96(XL)	Y	8.5	671	241			N/A	
	19	**225/40ZR19**	93(XL)	Y	8	663	230	C	A	71	2
	19	**225/40RF19**	93(XL)	Y	8	663	230	E	B	71	2
	18	**275/40RF18**	99	Y	9.5	677	278	E	A	71	2
	18	**245/40ZR18**	97(XL)	Y	8.5	653	248	C	A	71	2
	18	**245/40RF18**	97(XL)	Y	8.5	653	248			N/A	
	18	**235/40ZR18**	95(XL)	Y	8.5	645	241	E	A	71	2
	18	**225/40ZR18**	92(XL)	Y	8	637	230	E	A	71	2
	18	**225/40ZR18**	92(XL)	W	8	637	230	E	A	71	2
	18	**225/40RF18**	92(XL)	Y	8	637	230	E	B	71	2
	17	**215/40ZR17**	87(XL)	W	7.5	604	218			N/A	
	17	**215/40R17**	87(XL)	V	7.5	604	218	E	A	71	2
	17	**205/40R17**	84(XL)	V	7.5	596	212	E	A	71	2
	16	**215/40R16**	86(XL)	V	7.5	578	218	E	A	71	2
	16	**195/40ZR16**	80(XL)	W	7	562	200	E	B	71	2
45'	21	**265/45ZR21**	104	W	9	771	266	C	A	71	2
	20	**245/45ZR20**	103(XL)	Y	8	728	243	C	A	71	2
	20	**235/45ZR20**	100(XL)	W	8	720	236	C	A	71	2
	19	**245/45RF19**	102(XL)	Y	8	703	243			N/A	
	*19	**235/45ZRF19**	95	W	8	695	236			N/A	
	19	**225/45ZR19**	96(XL)	W	7.5	685	225	C	A	71	2
	*18	**245/45ZRF18**	100(XL)	W	8	677	243	E	A	71	2
	18	**245/45ZR18**	100(XL)	Y	8	677	243	C	A	71	2
	18	**235/45ZR18**	98(XL)	W	8	669	236	C	A	71	2
	17	**255/45ZR17**	98	Y	8.5	662	255	E	A	71	2
	*17	**225/45ZRF17**	91	W	7.5	634	225	E	B	71	2
	17	**225/45ZR17**	94(XL)	W	7.5	634	225	C	A	71	2
	17	**225/45ZR17**	94(XL)	Y	7.5	634	225	C	A	71	2
	17	**225/45R17**	94(XL)	V	7.5	634	225	C	A	71	2
	17	**215/45ZR17**	91(XL)	W	7	626	213	C	A	71	2
	17	**215/45R17**	91(XL)	V	7	626	213	E	A	71	2
	17	**205/45R17**	88(XL)	V	7	616	206	E	A	71	2
	16	**245/45ZR16**	94	W	8	626	243	E	A	71	2
	16	**215/45R16**	90(XL)	V	7	600	213	E	A	71	2
	16	**205/45R16**	87(XL)	V	7	590	206			N/A	
	16	**195/45R16**	84(XL)	V	6.5	582	195	E	B	71	2
50'	*19	**255/50ZRF19**	107(XL)	W	8	739	265	E	A	71	2
	18	**245/50ZR18**	104(XL)	W	7.5	703	253	C	A	71	2
	*18	**235/50ZRF18**	97	W	7.5	693	245			N/A	
	17	**235/50ZR17**	96	W	7.5	668	245	C	A	71	2
	*17	**225/50ZRF17**	98(XL)	W	7	658	233	E	B	71	2
	17	**225/50ZR17**	98(XL)	Y	7	658	233	C	A	71	2
	17	**215/50ZR17**	95(XL)	Y	7	645	222	C	A	71	2
	17	**205/50ZR17**	93(XL)	Y	6.5	638	214	E	A	71	2
	17	**205/50R17**	93(XL)	V	6.5	638	214	C	A	71	2
	16	**175/50R16**	81(XL)	H	5.5	582	182	E	B	71	2
55'	*18	**255/55ZRF18**	109(XL)	W	8	737	265			N/A	
	17	**235/55ZR17**	103(XL)	W	7.5	690	245	C	A	71	2
	*17	**225/55ZRF17**	101(XL)	W	7	680	233	E	B	71	2
	17	**225/55ZR17**	101(XL)	Y	7	680	233	C	A	71	2
	17	**215/55ZR17**	98(XL)	W	7	668	226	C	A	71	2
	17	**205/55R17**	95(XL)	V	6.5	658	214	C	A	71	2
	16	**225/55ZR16**	99(XL)	Y	7	654	233	C	A	71	2
	16	**215/55ZR16**	97(XL)	Y	7	642	226	C	A	71	2
	16	**215/55R16**	93	V	7	642	226			N/A	
	16	**205/55ZR16**	94(XL)	W	6.5	632	214	C	A	71	2
	16	**205/55R16**	94(XL)	V	6.5	632	214	C	A	71	2
60'	17	**215/60R17**	96	H	6.5	690	221	C	A	71	2

N/A =Values are not available at the time of publication.
*ZPMS =Zero Pressure Mobility System

NS-2R

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Wet Grip | Handling | Ultimate Grip

TREADWEAR
TW80、TW120、TW180

TAIWAN EXCELLENCE 2016

EXPLORING THE LIMITS

NS-2R Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
30'	20	**305/30ZR20**	103(XL)	Y	11	692	313	E	B	75	2
	19	**275/30ZR19**	96(XL)	Y	9.5	649	278			N/A	
	19	**265/30ZR19**	93(XL)	Y	9.5	643	271			N/A	
	18	**315/30ZR18**	98	Y	11	647	320			N/A	
	18	**295/30ZR18**	98(XL)	Y	10.5	635	301			N/A	
	18	**285/30ZR18**	93	Y	10	629	290			N/A	
35'	20	**285/35ZR20**	100	Y	10	708	290	F	B	74	2
	20	**265/35ZR20**	99(XL)	Y	9.5	694	271	E	B	73	2
	19	**245/35ZR19**	93(XL)	Y	8.5	655	248			N/A	
	19	**235/35ZR19**	91(XL)	Y	8.5	647	241			N/A	
	18	**285/35ZR18**	101(XL)	Y	10	657	290	F	B	74	2
	18	**265/35ZR18**	97(XL)	Y	9.5	643	271	F	B	73	2
	18	**255/35ZR18**	94(XL)	Y	9	635	260	F	B	73	2
	18	**225/35ZR18**	87(XL)	Y	8	615	230	F	B	72	2
	18	**215/35ZR18**	84(XL)	Y	7.5	607	218	F	B	71	2
40'	20	**255/40ZR20**	101(XL)	Y	9	712	260	F	B	73	2
	18	**245/40ZR18**	97(XL)	W	8.5	653	248	F	B	72	2
	18	**235/40ZR18**	95(XL)	Y	8.5	645	241	F	B	72	2
	18	**225/40ZR18**	92(XL)	Y	8	637	230	E	B	71	2
	17	**255/40ZR17**	94	W	0	0	0			N/A	
	17	**255/40ZR17**	98(XL)	W	9	636	260	F	B	73	2
	17	**245/40ZR17**	91	W	8.5	628	248			N/A	
	17	**235/40ZR17**	94(XL)	W	8.5	620	241	F	B	72	2
	17	**205/40ZR17**	84(XL)	W	7.5	596	212	E	B	71	2
45'	18	**265/45ZR18**	101	Y	9	695	266	F	B	72	2
	18	**235/45ZR18**	98(XL)	Y	8	669	236	F	B	72	2
	18	**225/45ZR18**	95(XL)	W	7.5	659	225	F	B	71	2
	18	**215/45ZR18**	93(XL)	W	7	651	213	F	C	71	2
	17	**235/45ZR17**	97(XL)	W	8	644	236	F	B	72	2
	17	**225/45ZR17**	94(XL)	W	7.5	634	225	E	B	71	2
	17	**215/45ZR17**	91(XL)	W	7	626	213	F	B	71	2
	17	**205/45ZR17**	88(XL)	W	7	616	206	F	B	71	2
	17	**195/45ZR17**	85(XL)	Y	6.5	608	195	F	B	71	2
	16	**225/45ZR16**	93(XL)	W	7.5	608	225	E	B	71	2
	16	**215/45ZR16**	86	W	7	600	213			N/A	
	16	**205/45ZR16**	87(XL)	W	7	590	206	F	B	71	2
	16	**195/45R16**	84(XL)	V	6.5	582	195	F	B	71	2
	15	**225/45ZR15**	87	W	7.5	583	225			N/A	
50'	16	**195/50ZR16**	88(XL)	W	6	602	201	E	B	71	2
	16	**165/50R16**	75	V	5	572	170			N/A	
	15	**205/50ZR15**	89(XL)	W	6.5	587	214	E	B	71	2
	15	**195/50ZR15**	86(XL)	W	6	577	201	F	B	71	2
	15	**165/50R15**	73	V	5	547	170			N/A	
	13	**175/50R13**	72	V	5.5	506	182			N/A	
55'	16	**205/55ZR16**	91	W	6.5	632	214	F	B	71	2
	16	**205/55ZR16**	94(XL)	W	6.5	632	214	E	B	71	2
	15	**195/55ZR15**	89(XL)	W	6	595	201	F	B	71	2
	15	**165/55R15**	75	V	5	563	170			N/A	
	14	**165/55R14**	72	V	5	538	170			N/A	
60'	14	**185/60R14**	86(XL)	V	5.5	578	189	F	B	71	2
	13	**185/60R13**	84(XL)	V	5.5	552	189	F	B	71	2
	13	**175/60R13**	77	V	5	540	177			N/A	
65'	13	**155/65R13**	73	H	4.5	532	157			N/A	

N/A =Values are not available at the time of publication.

Sportnex

NANKANG

NS-20

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Wet Grip | Low Noise

TAIWAN EXCELLENCE 2012

NS-20 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
30'	22	245/30ZR22	95(XL)	W	8.5	707	248	E	C	72	2
	22	225/30ZR22	87(XL)	W	8	695	230	E	C	72	2
	20	285/30ZR20	99(XL)	Y	10	680	290	E	C	74	1
	20	275/30ZR20	97(XL)	Y	9.5	674	278	E	C	72	2
	20	255/30ZR20	92(XL)	Y	9	662	260	E	C	72	2
	20	245/30ZR20	95(XL)	Y	8.5	656	248	E	C	72	2
	20	235/30ZR20	88(XL)	Y	8.5	650	242	E	C	72	2
	20	225/30ZR20	85(XL)	W	8	644	230	E	C	72	2
	20	215/30ZR20	82(XL)	W	7.5	638	218	E	C	72	2
	19	305/30ZR19	102(XL)	Y	11	667	313	E	C	72	1
	19	295/30ZR19	100(XL)	Y	10.5	661	301	E	C	74	2
	19	285/30ZR19	98(XL)	Y	10	655	290	E	C	74	1
	19	275/30ZR19	96(XL)	Y	9.5	649	278	E	C	72	2
	19	265/30ZR19	93(XL)	Y	9.5	643	271	E	C	72	2
	19	255/30ZR19	91(XL)	Y	9	637	260	E	C	72	2
35'	20	275/35ZR20	102(XL)	Y	9.5	700	278	E	C	73	2
	20	255/35ZR20	97(XL)	Y	9	686	260	E	C	72	2
	20	245/35ZR20	95(XL)	Y	8.5	680	248	E	C	72	2
	20	235/35ZR20	92(XL)	W	8.5	672	241	E	C	72	2
	20	225/35ZR20	93(XL)	Y	8	666	230	E	C	72	2
	19	275/35ZR19	96	Y	9.5	675	278	E	C	72	2
	19	265/35ZR19	98(XL)	Y	9.5	669	271	E	C	72	2
	19	255/35ZR19	96(XL)	Y	9	661	260	E	C	72	2
	19	245/35ZR19	93(XL)	Y	8.5	655	248	E	C	72	2
	19	235/35ZR19	91(XL)	Y	8.5	647	241	E	C	72	2
	19	225/35ZR19	88(XL)	Y	8	641	230	E	C	72	2
	19	215/35ZR19	85(XL)	Y	7.5	633	218	E	C	72	2
	18	275/35ZR18	95	Y	9.5	649	278	E	C	72	2
	18	275/35R18	95	H	9.5	649	278	E	C	72	2
	18	265/35ZR18	97(XL)	Y	9.5	643	271	E	C	72	2
35'	18	265/35R18	93	H	9.5	643	271	E	C	72	2
	18	255/35ZR18	94(XL)	W	9	635	260	E	C	72	2
	18	255/35R18	94(XL)	H	9	635	260	E	C	72	2
	18	245/35ZR18	92(XL)	Y	8.5	629	248	E	C	72	2
	18	245/35R18	92(XL)	H	8.5	629	248	E	C	72	2
	18	225/35ZR18	87(XL)	Y	8	615	230	E	C	72	2
	18	225/35R18	87(XL)	H	8	615	230	E	C	72	2
	18	215/35ZR18	84(XL)	Y	7.5	607	218	E	C	72	2
	18	215/35R18	84(XL)	H	7.5	607	218	E	C	72	2
	18	205/35R18	81(XL)	H	7.5	601	212	E	C	72	2
	17	185/35R17	82(XL)	V	6.5	562	188	E	C	72	2
	17	165/35R17	75(XL)	V	6	548	170	E	C	72	2
40'	20	245/40ZR20	95	Y	8.5	704	248	E	C	72	2
	19	275/40ZR19	101	Y	9.5	703	278	E	C	72	2
	19	255/40ZR19	100(XL)	Y	9	687	260	E	C	72	2
	19	245/40ZR19	98(XL)	Y	8.5	679	248	E	C	72	2
	19	225/40ZR19	93(XL)	Y	8	663	230	E	C	72	2
	18	245/40ZR18	97(XL)	W	8.5	653	248	E	C	72	2
	18	245/40R18	97(XL)	H	8.5	653	248	E	C	72	2
	18	235/40ZR18	95(XL)	W	8.5	645	241	E	C	72	2
	18	235/40R18	95(XL)	H	8.5	645	241	E	C	72	2
	18	225/40ZR18	92(XL)	W	8	637	230	E	C	72	2
	18	225/40R18	92(XL)	H	8	637	230	E	C	72	2
	18	215/40ZR18	89(XL)	W	7.5	629	218	E	C	72	2
	18	215/40R18	89(XL)	H	7.5	629	218	E	C	72	2
	17	255/40ZR17	94	W	9	636	260	E	C	72	2
	17	255/40R17	94	V	9	636	260	E	C	72	2
	17	245/40ZR17	91	W	8.5	628	248	E	C	71	2
	17	245/40R17	91	V	8.5	628	248	E	C	71	2
	17	235/40ZR17	90	W	8.5	620	241	E	C	72	2
40'	17	235/40R17	90	V	8.5	620	241	E	C	71	2
	17	215/40ZR17	87(XL)	W	7.5	604	218	E	C	72	2
	17	215/40R17	87(XL)	V	7.5	604	218	E	C	72	2
	17	205/40ZR17	84(XL)	W	7.5	596	212	E	C	72	2
	17	205/40R17	84(XL)	V	7.5	596	212	E	C	72	2
	17	205/40R17	84(XL)	H	7.5	596	212		N/A		
	17	165/40R17	75(XL)	V	6	564	170	E	C	71	2
	16	215/40R16	86(XL)	V	7.5	578	218	E	C	72	2
	16	205/40R16	83(XL)	V	7.5	570	212	E	C	72	2
	16	195/40R16	80(XL)	V	7	562	200	E	C	72	2
	16	165/40R16	73(XL)	V	6	538	170	E	C	71	2
	15	215/40ZR15	86(XL)	W	7.5	553	218		N/A		
	14	225/40R14	82	V	8	536	230		N/A		
45'	19	245/45ZR19	98	Y	8	703	243	E	C	71	2
	18	255/45ZR18	99	Y	8.5	687	255	E	C	72	2
	18	255/45R18	103(XL)	H	8.5	687	255		N/A		
	18	245/45ZR18	100(XL)	W	8	677	243	E	C	72	2
	18	245/45ZR18	100(XL)	Y	8	677	243	E	C	72	2
	18	245/45R18	100(XL)	H	8	677	243	E	C	72	2
	18	225/45ZR18	95(XL)	W	7.5	659	225	E	C	72	2
	18	225/45R18	95(XL)	H	7.5	659	225	E	C	72	2
	17	245/45ZR17	99(XL)	Y	8	652	243	E	C	72	2
	17	245/45R17	95	H	8	652	243	E	C	71	2
	17	245/45R17	95	V	8	652	243	E	C	71	2
	17	235/45ZR17	97(XL)	W	8	644	236	E	C	72	2
	17	235/45R17	97(XL)	V	8	644	236	E	C	72	2
	17	225/45ZR17	94(XL)	W	7.5	634	225	E	C	72	2
	17	225/45R17	94(XL)	H	7.5	634	225		N/A		
	17	225/45R17	94(XL)	V	7.5	634	225	E	C	72	2
	17	215/45ZR17	91(XL)	W	7	626	213	E	C	72	2
	17	215/45R17	91(XL)	V	7	626	213	E	C	72	2
	17	205/45ZR17	88(XL)	W	7	616	206	E	C	72	2
	17	205/45R17	88(XL)	V	7	616	206	E	C	72	2
	16	225/45ZR16	89	W	7.5	608	225	E	C	71	2
	16	215/45R16	90(XL)	V	7	600	213	E	C	72	2
	16	205/45R16	87(XL)	V	7	590	206	E	C	72	2
	16	195/45R16	84(XL)	V	6.5	582	195	E	C	72	2
	16	165/45R16	74(XL)	V	5.5	554	165	E	C	71	2
	15	185/45R15	75	V	6	547	183	E	C	72	2
	14	195/45R14	77	V	6.5	532	195		N/A		
50'	18	245/50ZR18	104(XL)	Y	7.5	703	253	E	C	72	2
	18	245/50R18	104(XL)	H	7.5	703	253		N/A		
	17	225/50ZR17	98(XL)	Y	7	658	233	E	C	72	2
	17	225/50R17	94	V	7	658	233	E	C	71	2
	17	215/50ZR17	95(XL)	W	7	648	226	E	C	72	2
	17	215/50R17	95(XL)	V	7	648	226	E	C	72	2
	17	205/50ZR17	93(XL)	W	6.5	638	214	E	C	72	2
	17	205/50R17	93(XL)	V	6.5	638	214	E	C	72	2
	16	225/50ZR16	96(XL)	W	7	632	233	E	C	72	2
	16	225/50R16	96(XL)	V	7	632	233	E	C	72	2
	16	205/50ZR16	87	W	6.5	612	214	E	C	71	2
	16	205/50R16	87	V	6.5	612	214	E	C	71	2
	16	195/50R16	88(XL)	V	6	602	201	E	C	72	2
	16	175/50R16	77	T	5.5	582	182	E	C	70	2
	15	195/50R15	82	V	6	577	201	E	C	71	2
	15	165/50R15	72	H	5	547	170	E	C	70	2
	14	175/50R14	74	H	5.5	532	182	E	C	70	2
55'	18	225/55R18	98	V	7	705	233	E	C	71	2
	17	235/55ZR17	103(XL)	W	7.5	690	245	E	C	72	2
	17	235/55R17	103(XL)	H	7.5	690	245	E	C	72	2
	17	225/55ZR17	101(XL)	W	7	680	233	E	C	72	2
	17	215/55ZR17	98(XL)	W	7	668	226	E	C	72	2
	17	215/55R17	94	V	7	668	226	E	C	72	2
	17	205/55ZR17	95(XL)	Y	6.5	658	214	E	C	72	2
	16	225/55ZR16	99(XL)	Y	7	654	233	E	C	72	2
	16	225/55R16	99(XL)	V	7	654	233		N/A		
	16	225/55R16	95	V	7	654	233	E	C	71	2
	16	215/55ZR16	97(XL)	Y	7	642	226	E	C	72	2
	16	215/55R16	93	V	7	642	226	E	C	71	2
60'	16	205/55ZR16	94(XL)	W	6.5	632	214	E	C	72	2
	16	205/55R16	94(XL)	V	6.5	632	214	E	C	72	2
	15	205/55R15	88	V	6.5	607	214	E	C	71	2
	15	195/55R15	85	V	6	595	201	E	C	71	2
	14	165/55R14	72	H	5	538	170	N/A	N/A	70	N/A
	14	155/55R14	73(XL)	H	5	526	162	E	C	70	2
	14	155/55R14	69	H	5	526	162	N/A	N/A	70	N/A
	13	195/55R13	80	H	6	544	201	E	C	71	2
65'	15	205/60R15	91	H	6	627	209	E	C	71	2
	14	205/60R14	88	H	6	602	209	E	C	71	2
	14	155/65R14	75	H	4.5	558	157	E	C	70	2
	13	155/65R13	73	S	4.5	532	157	N/A	N/A	70	N/A

N/A =Values are not available at the time of publication.

NS-25

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Low Noise | Wet Grip | Handling

TAIWAN EXCELLENCE 2019

NS-25 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
25'	24	**275/25ZR24**	96(XL)	W	10	748	283			N/A	
	22	**295/25ZR22**	97(XL)	Y	10.5	707	301			N/A	
	22	**285/25ZR22**	95(XL)	Y	10.5	701	295			N/A	
30'	22	**265/30ZR22**	97(XL)	W	9.5	719	271			N/A	
	22	**255/30ZR22**	95(XL)	W	9	713	260			N/A	
	22	**245/30ZR22**	92(XL)	W	8.5	707	248			N/A	
	22	**245/30ZR22**	95(XL)	W	8.5	707	248			N/A	
	22	**235/30ZR22**	90(XL)	Y	8.5	701	241			N/A	
	21	**255/30ZR21**	93(XL)	Y	9	687	260			N/A	
	21	**245/30ZR21**	91(XL)	Y	8.5	681	248			N/A	
	20	**285/30ZR20**	99(XL)	W	10	680	290			N/A	
	20	**275/30ZR20**	97(XL)	W	9.5	674	278			N/A	
	20	**255/30ZR20**	92(XL)	Y	9	662	260			N/A	
	20	**245/30ZR20**	90(XL)	Y	8.5	656	248			N/A	
	20	**245/30ZR20**	95(XL)	Y	8.5	656	248			N/A	
	20	**225/30ZR20**	85(XL)	W	8	644	230			N/A	
	20	**215/30ZR20**	82(XL)	W	7.5	638	218			N/A	
	19	**285/30ZR19**	98(XL)	Y	10	655	290			N/A	
	19	**275/30ZR19**	96(XL)	Y	9.5	649	278			N/A	
	19	**265/30ZR19**	93(XL)	Y	9.5	643	271			N/A	
	19	**255/30ZR19**	91(XL)	Y	9	637	260			N/A	
	19	**245/30ZR19**	89(XL)	Y	8.5	631	248			N/A	
	18	**285/30R18**	93	H	10	629	290			N/A	
35'	21	**295/35ZR21**	107(XL)	Y	10.5	739	301			N/A	
	20	**275/35ZR20**	102(XL)	Y	9.5	700	278			N/A	
	20	**265/35ZR20**	99(XL)	Y	9.5	694	271			N/A	
	20	**255/35ZR20**	97(XL)	Y	9	686	260			N/A	
	20	**245/35ZR20**	97(XL)	Y	8.5	680	248			N/A	
	20	**245/35ZR20**	95(XL)	Y	8.5	680	248			N/A	
	20	**235/35ZR20**	92(XL)	W	8.5	672	241			N/A	
	20	**225/35ZR20**	93(XL)	W	8	666	230			N/A	
	20	**225/35ZR20**	90(XL)	W	8	666	230			N/A	
	19	**275/35ZR19**	96	Y	9.5	675	278			N/A	
	19	**265/35ZR19**	98(XL)	Y	9.5	669	271			N/A	
	19	**255/35ZR19**	96(XL)	Y	9	661	260			N/A	
	19	**245/35ZR19**	93(XL)	Y	8.5	655	248			N/A	
	19	**235/35ZR19**	91(XL)	Y	8.5	647	241			N/A	
	19	**225/35ZR19**	88(XL)	Y	8	641	230			N/A	
	19	**215/35ZR19**	85(XL)	Y	7.5	633	218			N/A	
	18	**275/35R18**	99(XL)	H	9.5	649	278			N/A	
	18	**265/35R18**	97(XL)	V	9.5	643	271			N/A	
	18	**255/35ZR18**	94(XL)	W	9	635	260			N/A	
	18	**255/35R18**	94(XL)	H	9	635	260			N/A	
	18	**245/35R18**	92(XL)	H	8.5	629	248			N/A	
	18	**225/35R18**	87(XL)	H	8	615	230			N/A	
	18	**215/35R18**	84(XL)	H	7.5	607	218			N/A	
	18	**205/35R18**	81(XL)	H	7.5	601	212			N/A	
	18	**165/35R18**	82(XL)	V	6	573	170			N/A	
	17	**225/35R17**	86(XL)	V	8	590	230			N/A	
	17	**185/35R17**	82(XL)	V	6.5	562	188			N/A	
	17	**165/35R17**	75(XL)	V	6	548	170			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
40'	20	**275/40ZR20**	106(XL)	W	9.5	728	278			N/A	
	20	**245/40ZR20**	99(XL)	W	8.5	704	248			N/A	
	19	**275/40ZR19**	101	Y	9.5	703	278			N/A	
	19	**255/40ZR19**	100(XL)	Y	9	687	260			N/A	
	19	**245/40ZR19**	98(XL)	Y	8.5	679	248			N/A	
	19	**235/40ZR19**	96(XL)	Y	8.5	671	241			N/A	
	19	**225/40ZR19**	93(XL)	Y	8	663	230			N/A	
	18	**275/40ZR18**	99	W	9.5	677	278			N/A	
	18	**275/40R18**	99	H	9.5	677	278			N/A	
	18	**265/40R18**	101(XL)	H	9.5	669	271			N/A	
	18	**255/40R18**	99(XL)	H	9	661	260			N/A	
	18	**245/40R18**	97(XL)	H	8.5	653	248			N/A	
	18	**235/40R18**	95(XL)	H	8.5	645	241			N/A	
	18	**225/40ZR18**	92(XL)	W	8	637	230			N/A	
	18	**225/40R18**	92(XL)	H	8	637	230			N/A	
	18	**215/40ZR18**	89(XL)	W	7.5	629	218			N/A	
	18	**215/40R18**	89(XL)	H	7.5	629	218			N/A	
	18	**205/40R18**	86(XL)	H	7.5	621	212			N/A	
	18	**165/40R18**	85(XL)	V	6	589	170			N/A	
	17	**275/40ZR17**	98	W	9.5	652	278			N/A	
	17	**255/40R17**	94	V	9	636	260			N/A	
	17	**245/40ZR17**	91	W	8.5	628	248			N/A	
	17	**235/40R17**	94(XL)	V	8.5	620	241			N/A	
	17	**215/40R17**	87(XL)	V	7.5	604	218			N/A	
	17	**205/40R17**	84(XL)	H	7.5	596	212			N/A	
	17	**195/40R17**	81(XL)	H	7	588	200			N/A	
	17	**165/40R17**	75(XL)	V	6	564	170			N/A	
	16	**195/40R16**	80(XL)	V	7	562	200			N/A	
	16	**165/40R16**	73(XL)	V	6	538	170			N/A	
45'	20	**245/45ZR20**	103(XL)	W	8	728	243			N/A	
	19	**285/45ZR19**	111(XL)	W	9.5	739	285			N/A	
	19	**275/45ZR19**	108(XL)	Y	9	731	273			N/A	
	19	**245/45ZR19**	102(XL)	Y	8	703	243			N/A	
	19	**225/45ZR19**	96(XL)	W	7.5	685	225			N/A	
	18	**255/45ZR18**	103(XL)	W	8.5	687	255			N/A	
	18	**245/45R18**	100(XL)	H	8	677	243			N/A	
	18	**235/45R18**	98(XL)	H	8	669	236			N/A	
	18	**225/45R18**	95(XL)	H	7.5	659	225			N/A	
	18	**215/45R18**	93(XL)	H	7	651	213			N/A	
	17	**255/45R17**	98	V	8.5	662	255			N/A	
	17	**245/45R17**	95	V	8	652	243	E	B	71	2
	17	**235/45R17**	97(XL)	V	8	644	236			N/A	
	17	**225/45R17**	94(XL)	V	7.5	634	225			N/A	
	17	**215/45R17**	91(XL)	V	7	626	213			N/A	
	17	**205/45R17**	88(XL)	V	7	616	206			N/A	
	17	**195/45R17**	85(XL)	H	6.5	608	195			N/A	
	17	**165/45R17**	75(XL)	V	5.5	580	165			N/A	
	16	**205/45R16**	87(XL)	V	7	590	206			N/A	
	15	**165/45R15**	72(XL)	V	5.5	529	165			N/A	
50'	19	**235/50ZR19**	99	W	7.5	719	245			N/A	
	18	**245/50R18**	104(XL)	H	7.5	703	253			N/A	
	18	**235/50R18**	97	H	7.5	693	245			N/A	
	18	**225/50ZR18**	95	W	7	683	233			N/A	
	18	**225/50R18**	95	H	7	683	233			N/A	
	17	**245/50ZR17**	99	W	7.5	678	253			N/A	
	17	**235/50R17**	96	V	7.5	668	245			N/A	
	17	**225/50R17**	94	V	7	658	233			N/A	
	17	**215/50R17**	95(XL)	V	7	648	226			N/A	
	17	**205/50R17**	93(XL)	V	6.5	638	214			N/A	
	16	**205/50R16**	87	V	6.5	612	214			N/A	
	16	**195/50R16**	88(XL)	V	6	602	201			N/A	
	16	**165/50R16**	75	V	5	572	170			N/A	
	13	**175/50R13**	72	V	5.5	506	182			N/A	
55'	19	**225/55ZR19**	99	Y	7	731	233			N/A	
	18	**245/55R18**	103	V	7.5	727	253			N/A	
	18	**235/55R18**	104(XL)	H	7.5	715	245			N/A	
	18	**225/55R18**	98	H	7	705	233			N/A	
	17	**235/55R17**	103(XL)	V	7.5	690	245			N/A	
	17	**225/55R17**	101(XL)	V	7	680	233			N/A	
	17	**215/55R17**	94	V	7	668	226			N/A	
	17	**205/55R17**	91	V	6.5	658	214			N/A	
	16	**225/55R16**	95	V	7	654	233			N/A	
	16	**215/55R16**	97(XL)	V	7	642	226			N/A	
	16	**205/55R16**	91	V	6.5	632	214			N/A	
	16	**195/55R16**	87	V	6	620	201			N/A	
	16	**185/55R16**	87(XL)	V	6	610	194			N/A	
	15	**205/55R15**	88	V	6.5	607	214			N/A	
	15	**195/55R15**	85	V	6	595	201			N/A	
	15	**175/55R15**	77	V	5.5	573	182			N/A	
	15	**165/55R15**	75	V	5	563	170			N/A	
	14	**165/55R14**	72	V	5	538	170			N/A	
60'	18	**265/60R18**	110	H	8	775	272			N/A	
	18	**235/60R18**	107(XL)	H	7	739	240			N/A	
	18	**225/60R18**	100	H	6.5	727	228			N/A	
	17	**225/60R17**	99	H	6.5	702	228			N/A	
	17	**215/60R17**	96	H	6.5	690	221			N/A	
	16	**205/60R16**	96(XL)	H	6	652	209			N/A	
	16	**195/60R16**	89	H	6	640	201			N/A	
	16	**185/60R16**	90(XL)	H	5.5	628	189			N/A	
	14	**165/60R14**	75	H	5	554	170			N/A	
65'	17	**225/65R17**	102	V	6.5	724	228			N/A	
	16	**205/65R16**	95	H	6	672	209			N/A	

N/A =Values are not available at the time of publication.

NANKANG

AS-1

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Comfort | Low Noise

AS-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value	Noise Class
30'	21	**285/30ZR21**	100(XL)	Y	10	705	290	E	C	74	2
	21	**255/30ZR21**	93(XL)	Y	9	687	260	E	C	73	2
35'	21	**295/35ZR21**	107(XL)	Y	10.5	739	301	E	C	74	2
	21	**245/35ZR21**	96(XL)	Y	8.5	705	248	E	C	71	2
	20	**315/35ZR20**	110(XL)	Y	11	728	320	E	C	74	2
	18	**255/35ZR18**	94(XL)	W	9	635	260	E	C	71	2
	18	**255/35R18**	94(XL)	H	9	635	260	E	C	71	2
	18	**225/35R18**	87(XL)	H	8	615	230	E	C	71	2
	18	**215/35R18**	84(XL)	H	7.5	607	218	E	C	71	2
	18	**205/35R18**	81(XL)	H	7.5	601	212	E	C	71	2
	18	**165/35R18**	82(XL)	V	6	573	170	E	C	71	2
40'	20	**275/40ZR20**	106(XL)	Y	9.5	728	278	E	C	73	2
	20	**265/40ZR20**	104(XL)	Y	9.5	720	271	E	C	72	2
	19	**255/40ZR19**	100(XL)	Y	9	687	260	E	C	71	2
	19	**235/40ZR19**	96(XL)	Y	8.5	671	241	E	C	71	2
	18	**275/40ZR18**	99	W	9.5	677	278	E	C	72	2
	18	**275/40R18**	99	H	9.5	677	278	E	C	72	2
	18	**265/40ZR18**	101(XL)	Y	9.5	669	271	E	C	72	2
	18	**265/40R18**	101(XL)	H	9.5	669	271	E	C	72	2
	18	**255/40ZR18**	99(XL)	Y	9	661	260	E	C	71	2
	18	**255/40R18**	99(XL)	H	9	661	260	E	C	71	2
	18	**245/40ZR18**	97(XL)	Y	8.5	653	248	E	C	71	2
	18	**245/40R18**	97(XL)	H	8.5	653	248	E	C	71	2
	18	**235/40ZR18**	95(XL)	Y	8.5	645	241	E	C	71	2
	18	**235/40R18**	95(XL)	H	8.5	645	241	E	C	71	2
	18	**225/40ZR18**	92(XL)	Y	8	637	230	E	C	71	2
	18	**225/40R18**	92(XL)	V	8	637	230	E	C	71	2
	18	**225/40R18**	92(XL)	H	8	637	230	E	C	71	2
	18	**215/40R18**	89(XL)	H	7.5	629	218	E	C	71	2
	18	**205/40ZR18**	86(XL)	W	7.5	621	212	E	C	71	2
	18	**205/40R18**	86(XL)	H	7.5	621	212	E	C	71	2
	17	**195/40ZR17**	81(XL)	W	7	588	200	E	C	71	2
	17	**195/40R17**	81(XL)	H	7	588	200	E	C	71	2
45'	20	**275/45ZR20**	106	Y	9	756	273	E	C	72	2
	20	**255/45ZR20**	105(XL)	W	8.5	738	255	E	C	71	2
	19	**225/45ZR19**	96(XL)	W	7.5	685	225	E	C	71	2
	18	**255/45ZR18**	103(XL)	Y	8.5	687	255	E	C	71	2
	18	**245/45ZR18**	100(XL)	W	8	677	243	E	C	71	2
	18	**245/45R18**	100(XL)	H	8	677	243	E	C	71	2
	18	**235/45ZR18**	98(XL)	W	8	669	236	E	C	71	2
	18	**235/45R18**	98(XL)	H	8	669	236	E	C	71	2
	18	**225/45ZR18**	95(XL)	W	7.5	659	225	E	C	71	2
	18	**225/45R18**	95(XL)	H	7.5	659	225	E	C	71	2
	18	**215/45R18**	93(XL)	H	7	651	213	E	C	71	2
	17	**225/45ZR17**	94(XL)	W	7.5	634	225	E	C	71	2
	17	**215/45R17**	91(XL)	V	7	626	213	E	C	71	2
	17	**195/45R17**	85(XL)	H	6.5	608	195	E	C	71	2
	17	**165/45R17**	75(XL)	V	5.5	580	165	E	C	71	2
	15	**165/45R15**	72(XL)	V	5.5	529	165	E	C	71	2
50'	18	**245/50R18**	104(XL)	T	7.5	703	253	E	C	71	2
	18	**235/50ZR18**	97	W	7.5	693	245	E	C	71	2
	18	**235/50R18**	97	H	7.5	693	245	E	C	71	2
	18	**225/50R18**	95	H	7	683	233	E	C	71	2
	17	**235/50R17**	96	V	7.5	668	245	E	C	71	2
	17	**225/50R17**	94	V	7	658	233	E	C	71	2
	17	**215/50R17**	91	V	7	648	226	E	C	71	2
	16	**165/50R16**	75	V	5	572	170	E	C	70	2
	13	**175/50R13**	72	V	5.5	506	182	E	C	70	2
	19	**225/55ZR19**	99	Y	7	731	233	E	C	71	2
	17	**225/55R17**	101(XL)	V	7	680	233	E	C	71	2
	17	**215/55R17**	94	V	7	668	226	E	C	71	2
	17	**205/55R17**	91	V	6.5	658	214	E	C	71	2
	16	**205/55R16**	91	V	6.5	632	214	E	C	71	2
55'	16	**195/55R16**	87	V	6	620	201	E	C	71	2
	15	**195/55R15**	85	V	6	595	201	E	C	71	2
	15	**175/55R15**	77	V	5.5	573	182	E	C	70	2
	15	**165/55R15**	75	V	5	563	170	E	C	70	2
	14	**165/55R14**	72	V	5	538	170	E	C	70	2
	14	**155/55R14**	73(XL)	V	5	526	162	E	C	70	2
	14	**155/55R14**	69	V	5	526	162	N/A	N/A	70	N/A
60'	18	**265/60R18**	110	H	8	775	272	E	C	72	2
	18	**225/60ZR18**	100	W	6.5	727	228	E	C	71	2
	18	**225/60R18**	100	H	6.5	727	228	E	C	71	2
	17	**215/60R17**	96	H	6.5	690	221	E	C	71	2
	16	**195/60R16**	89	H	6	640	201	E	C	71	2
	16	**185/60R16**	90(XL)	H	5.5	628	189	E	C	71	2
	15	**195/60R15**	88	H	6	615	201	E	C	71	2
	15	**175/60R15**	81	H	5	591	177	E	C	70	2
	15	**155/60R15**	74	V	4.5	567	157	E	C	70	2
	14	**165/60R14**	75	H	5	554	170	E	C	70	2
	13	**165/60R13**	77(XL)	H	5	528	170	E	C	71	2
65'	16	**215/65R16**	98	H	6.5	686	221	E	C	71	2
	16	**205/65R16**	95	H	6	672	209	E	C	71	2
	15	**205/65R15**	95	H	6	647	209	E	C	71	2
	15	**165/65R15**	81	T	5	595	170	E	C	70	2
	15	**145/65R15**	72	V	4.5	569	150	E	C	70	2
	14	**155/65R14**	75	V	4.5	558	157	E	C	70	2
70'	15	**135/70R15**	70	T	4	567	140	E	C	70	2
80'	12	**135/80R12**	68	S	3.5	521	133	E	C	70	2

N/A =Values are not available at the time of publication.

RX-615

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Comfort | Low Noise

RX-615 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
45'	17	**215/45R17**	91(XL)	V	7	626	213	E	C	69	1
	16	**205/45R16**	87(XL)	V	7	590	206	E	C	69	1
50'	16	**225/50R16**	92	V	7	632	233	E	C	69	2
	15	**205/50R15**	86	V	6.5	587	214	E	C	69	2
	15	**195/50R15**	82	V	6	577	201	E	C	69	2
55'	16	**225/55ZR16**	95	W	7	654	233	E	C	69	2
	16	**215/55R16**	93	V	7	642	226	E	C	69	2
	16	**205/55R16**	94(XL)	V	6.5	632	214	E	C	69	1
	16	**185/55R16**	83	V	6	610	194	E	C	69	2
	15	**195/55R15**	85	V	6	595	201	E	C	69	2
	14	**185/55R14**	80	H	6	560	194			N/A	
	14	**185/55R14**	80	V	6	560	194	E	C	69	2
60'	16	**225/60R16**	98	V	6.5	676	228	E	C	69	2
	16	**215/60R16**	99(XL)	V	6.5	664	221	E	C	69	1
	16	**205/60R16**	96(XL)	H	6	652	209			N/A	
	16	**205/60R16**	96(XL)	V	6	652	209	E	C	69	1
	15	**225/60R15**	96	V	6.5	651	228	E	C	69	2
	15	**215/60R15**	94	H	6.5	639	221	E	C	69	2
	15	**215/60R15**	94	V	6.5	639	221	E	C	69	2
	15	**205/60R15**	91	H	6	627	209	E	C	69	2
	15	**205/60R15**	91	V	6	627	209	E	C	69	2
	15	**195/60R15**	88	H	6	615	201	E	C	69	2
60'	15	**195/60R15**	88	V	6	615	201	E	C	69	2
	14	**215/60R14**	91	H	0	0	0	E	C	69	2
	14	**215/60R14**	91(WL)	H	6.5	614	221	F	C	69	2
	14	**205/60R14**	88	H	6	602	209	E	C	69	2
	14	**195/60R14**	86	H	6	590	201	E	C	69	2
	14	**185/60R14**	82	H	5.5	578	189			N/A	
	13	**205/60R13**	86	H	6	576	209	E	C	69	2
	13	**185/60R13**	80	H	5.5	552	189			N/A	
65'	16	**215/65R16**	98	V	6.5	686	221	E	C	69	2
	16	**205/65R16**	95	V	6	672	209	E	C	69	2
	15	**215/65R15**	96	V	6.5	661	221	E	C	69	2
	15	**215/65R15**	96	H	6.5	661	221	E	C	69	2
	15	**205/65R15**	95	H	6	647	209	E	C	69	2
	15	**205/65R15**	94	V	6	647	209	E	C	69	2
	15	**195/65R15**	91	H	6	635	201	E	C	69	2
	15	**195/65R15**	91	V	6	635	201	E	C	69	2
	15	**185/65R15**	88	H	5.5	621	189	E	C	69	2
	14	**195/65R14**	89	H	6	610	201	E	C	69	2
	14	**185/65R14**	86	H	5.5	596	189	E	C	69	2
	14	**175/65R14**	82	H	5	584	177			N/A	
	14	**155/65R14**	75(WR)	H	4.5	558	157	E	C	69	2
	13	**155/65R13**	73	T	4.5	532	157			N/A	
70'	14	**205/70R14**	95	H	6	644	209	E	C	69	2
	14	**195/70R14**	91	H	6	630	201	E	C	69	2
	14	**185/70R14**	88	H	5.5	616	189	E	C	69	2
	14	**175/70R14**	84	H	5	602	177	E	C	69	2
	13	**185/70R13**	86	H	5.5	590	189	E	C	69	2
	13	**175/70R13**	82	H	5	576	177			N/A	
	13	**165/70R13**	79	T	5	562	170			N/A	
	13	**155/70R13**	75	T	4.5	548	157	E	C	69	2
	13	**145/70R13**	71	T	4.5	534	150	E	C	69	2
80'	13	**145/80R13**	75	S	4	562	145	E	C	69	2
	12	**145/80R12**	74	S	4	537	145			N/A	

N/A =Values are not available at the time of publication.

NANKANG

XR-611

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Wet Grip | Comfort | Tread Life

XR-611 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
45'	18	**215/45R18**	93(XL)	V	7	651	213	E	C	71	2
50'	18	**215/50R18**	92	V	7	673	226	E	C	71	2
	17	**225/50R17**	94	V	7	658	233	E	C	71	2
	17	**215/50R17**	91	V	7	648	226	E	C	71	2
	15	**225/50R15**	91	V	7	607	233	E	C	71	2
	15	**205/50R15**	86	V	6.5	587	214			N/A	
55'	17	**215/55R17**	94	V	7	668	226	E	C	71	2
	16	**195/55R16**	87	V	6	620	201	E	C	71	2
	14	**185/55R14**	80	H	6	560	194	F	C	70	2
	14	**165/55R14**	72	V	5	538	170			N/A	
	13	**165/55R13**	70	H	5	512	170	E	C	70	2
60'	17	**225/60R17**	99	V	6.5	702	228			N/A	
	17	**215/60R17**	96	H	6.5	690	221			N/A	
	16	**235/60R16**	100	V	7	688	240	E	C	71	2
	16	**225/60R16**	98	V	6.5	676	228	E	C	71	2
	16	**215/60R16**	99(XL)	H	6.5	664	221	E	C	71	2
	16	**205/60R16**	96(XL)	V	6	652	209	E	C	71	2
	16	**205/60R16**	96(XL)	H	6	652	209	E	C	71	2
	16	**175/60R16**	82	H	5	616	177	E	C	70	2
	15	**235/60R15**	98	S	7	663	240	E	C	71	2
	15	**225/60R15**	96(WL)	V	6.5	651	228	E	C	71	2
	15	**225/60R15**	96	V	6.5	651	228	E	C	71	2
	15	**215/60R15**	94	H	6.5	639	221	E	C	71	2
	15	**205/60R15**	91(WL)	H	6	627	209	E	C	71	2
	15	**205/60R15**	91	V	6	627	209	E	C	71	2
	15	**205/60R15**	91	H	6	627	209	E	C	71	2
	15	**195/60R15**	88	H	6	615	201	E	C	71	2
	15	**195/60R15**	88	H	6	615	201	E	C	71	2
	15	**185/60R15**	88(XL)	H	5.5	603	189	E	C	71	2
	14	**205/60R14**	88	H	6	602	209	E	C	71	2
	14	**195/60R14**	86	H	6	590	201	E	C	71	2
60'	14	**185/60R14**	82	H	5.5	578	189	E	C	70	2
	14	**175/60R14**	79	H	5	566	177			N/A	
	13	**205/60R13**	86	H	6	576	209	E	C	71	2
	13	**185/60R13**	80	H	5.5	552	189			N/A	
	13	**175/60R13**	77	H	5	540	177			N/A	
65'	17	**215/65R17**	99	H	6.5	712	221			N/A	
	15	**215/65R15**	96	H	6.5	661	221	E	C	71	2
	15	**205/65R15**	95	V	6	647	209	E	C	71	2
	15	**205/65R15**	95	H	6	647	209	E	C	71	2
	15	**195/65R15**	95(XL)	H	6	635	201	E	C	71	2
	15	**195/65R15**	91	V	6	635	201	E	C	71	2
	15	**195/65R15**	91	H	6	635	201	E	C	71	2
	15	**185/65R15**	92(XL)	H	5.5	621	189	E	C	71	2
	15	**175/65R15**	88(XL)	H	5	609	177	E	C	71	2
	14	**195/65R14**	89	H	6	610	201	E	C	71	2
	14	**185/65R14**	86	H	5.5	596	189	E	C	70	2
	14	**175/65R14**	82	H	5	584	177	E	C	70	2
	14	**165/65R14**	79	H	5	570	170			N/A	
	13	**165/65R13**	77	H	5	544	170			N/A	
70'	13	**185/70R13**	90(XL)	H	5.5	590	189			N/A	
	13	**175/70R13**	86(XL)	H	5	576	177			N/A	
	12	**175/70R12**	85(WLXL)	T	5	551	177			N/A	
	12	**155/70R12**	73(WL)	T	4.5	523	157			N/A	
	12	**155/70R12**	77(XL)	T	4.5	523	157	E	C	70	2
	12	**155/70R12**	73	T	4.5	523	157			N/A	
80'	15	**175/80R15**	90	S	5	661	177	E	C	70	2

N/A =Values are not available at the time of publication.

N-729

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Wet Grip | Low Noise | Tread Life

N-729 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
50'	15	**295/50R15**	108(WL)	H	9.5	677	309			N/A	
	15	**265/50R15**	99(WL)	H	8.5	647	277			N/A	
	14	**265/50R14**	102(WLXL)	H	8.5	622	277			N/A	
	14	**245/50R14**	93(WL)	H	7.5	602	253			N/A	
	13	**235/50R13**	89(WL)	H	7.5	566	245			N/A	
	13	**215/50R13**	85(WL)	T	7	546	226			N/A	
60'	17	**215/60R17**	96(WL)	H	6.5	690	221			N/A	
	15	**245/60R15**	101(WL)	H	7	675	248			N/A	
	15	**235/60R15**	98(WL)	H	7	663	240			N/A	
	15	**205/60R15**	91(WL)	H	6	627	209	E	B	70	2
	15	**195/60R15**	88	H	6	615	201			N/A	
	14	**245/60R14**	98(WL)	H	7	650	248			N/A	
	14	**235/60R14**	96(WL)	H	7	638	240			N/A	
	14	**225/60R14**	94(WL)	H	6.5	626	228			N/A	
	14	**195/60R14**	86	H	6	590	201			N/A	
	14	**185/60R14**	82	H	5.5	578	189			N/A	
	13	**235/60R13**	94(WL)	H	7	612	238			N/A	
65'	16	**215/65R16**	98(WL)	H	6.5	686	221			N/A	
	16	**205/65R16**	95(WL)	H	6	672	209			N/A	
	15	**195/65R15**	91	H	6	635	201			N/A	
	15	**185/65R15**	88	H	5.5	621	189			N/A	
	14	**195/65R14**	89	H	6	610	201			N/A	
	14	**195/65R14**	89(WL)	T	6	610	201	E	B	70	2
	14	**185/65R14**	86	H	5.5	596	189			N/A	
	14	**185/65R14**	86(WL)	T	5.5	596	189	E	B	70	2
	14	**175/65R14**	82	H	5	584	177			N/A	
	13	**205/65R13**	86(WL)	H	6	597	209			N/A	
	13	**165/65R13**	77	H	5	544	170			N/A	
70'	14	**195/70R14**	95(WLXL)	T	6	630	201	E	B	72	2
	14	**185/70R14**	88	H	5.5	616	189			N/A	
	14	**185/70R14**	88(WL)	T	5.5	616	189	E	B	70	2
	14	**175/70R14**	84	H	5	602	177			N/A	
	14	**175/70R14**	84(WL)	T	5	602	177	E	B	70	2
	13	**185/70R13**	86(WL)	T	5.5	590	189	E	B	70	2
	13	**175/70R13**	82(WL)	T	5	576	177	E	B	70	2
	13	**175/70R13**	82(WR)	T	5	576	177			N/A	
	13	**165/70R13**	79(WL)	T	5	562	170	E	B	70	2
	13	**165/70R13**	79	H	5	562	170			N/A	

N/A = Values are not available at the time of publication.
WL = White Letter

NA-1

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Fuel Efficiency | Low Noise | Wet Grip

NA-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
45'	15	**165/45R15**	72(XL)	V	5.5	529	165	E	B	70	2
50'	16	**195/50R16**	88(XL)	V	6	602	201	C	B	70	2
	16	**185/50R16**	81	V	6	592	194	E	B	70	2
	15	**195/50R15**	82	V	6	577	201	E	B	70	2
	15	**175/50R15**	75	H	5.5	557	182	E	B	70	2
55'	20	**195/55R20**	95(XL)	H	6	722	201	C	B	70	2
	20	**175/55R20**	85	Q	5.5	700	182			N/A	
	16	**205/55ZR16**	91	W	6.5	632	214	C	B	70	2
	16	**205/55R16**	94(XL)	V	6.5	632	214	C	B	70	2
	16	**195/55R16**	87	V	6	620	201	E	B	70	2
	15	**205/55R15**	88	V	6.5	607	214			N/A	
	15	**195/55R15**	85	V	6	595	201	E	B	70	2
	15	**185/55R15**	82	V	6	585	194	E	B	70	2
	15	**185/55R15**	86(XL)	V	6	585	194	C	B	70	2
	15	**175/55R15**	77	V	5.5	573	182			N/A	
	14	**185/55R14**	80	H	6	560	194	E	B	70	2
	13	**165/55R13**	70	H	5	512	170	E	B	70	2
60'	20	**155/60R20**	80	Q	4.5	567	157			N/A	
	19	**175/60R19**	86	Q	5	693	177	C	B	70	2
	16	**215/60R16**	99(XL)	H	6.5	664	221	B	B	71	2
	16	**205/60R16**	96(XL)	V	6	652	209	C	B	70	2
	16	**205/60R16**	96(XL)	H	6	652	209	C	B	70	2
	16	**195/60R16**	89	H	6	640	201	E	B	70	2
	16	**185/60R16**	86	H	5.5	628	189	E	B	70	2
	16	**175/60R16**	82	H	5	616	177	E	B	70	2
	15	**235/60R15**	98	S	7	663	240	C	B	71	2
	15	**225/60R15**	96	V	6.5	651	228	C	B	71	2
	15	**205/60R15**	95(XL)	V	6	627	209	E	B	70	2
	15	**205/60R15**	91	H	6	627	209	C	B	70	2
	15	**195/60R15**	88	V	6	615	201	E	B	70	2

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
60'	15	**195/60R15**	88	H	6	615	201	E	B	70	2
	15	**185/60R15**	88(XL)	H	5.5	603	189	C	B	70	2
	15	**185/60R15**	84	H	5.5	603	189	E	B	70	2
	15	**175/60R15**	81	H	5	591	177	E	B	70	2
	15	**165/60R15**	77	H	5	579	170	E	B	70	2
	14	**195/60R14**	86	H	6	590	201	E	B	70	2
	14	**185/60R14**	82	H	5.5	578	189	C	B	70	2
	14	**175/60R14**	79	H	5	566	177	E	B	70	2
	13	**205/60R13**	86	H	6	576	209	E	B	70	2
	13	**185/60R13**	80	H	5.5	552	189	E	B	70	2
	13	**175/60R13**	77	H	5	540	177	E	B	70	2
65'	15	**215/65R15**	100(XL)	H	6.5	661	221	C	B	71	2
	15	**205/65R15**	99(XL)	H	6	647	209	C	B	70	2
	15	**205/65R15**	94	V	6	647	209	C	B	70	2
	15	**195/65R15**	95(XL)	H	6	635	201	C	B	70	2
	15	**195/65R15**	91	V	6	635	201	C	B	70	2
	15	**195/65R15**	91	H	6	635	201	C	B	70	2
	15	**185/65R15**	92(XL)	H	5.5	621	189	C	B	70	2
	15	**175/65R15**	88(XL)	H	5	609	177	C	B	70	2
	14	**195/65R14**	89	H	6	610	201	E	B	70	2
	14	**185/65R14**	86	H	5.5	596	189	C	B	70	2
	14	**175/65R14**	86(XL)	T	5	584	177	C	B	70	2
	14	**175/65R14**	82	T	5	584	177	E	B	70	2
	14	**165/65R14**	79	H	5	570	170	E	B	70	2
	14	**155/65R14**	75(WL)	S	4.5	558	157			N/A	
	13	**165/65R13**	77	H	5	544	170	E	B	70	2
	13	**155/65R13**	73	T	4.5	532	157	E	B	70	2
70'	19	**155/70R19**	84	Q	4.5	701	157	C	B	70	2
	14	**205/70R14**	98(XL)	T	6	644	209	C	B	70	2
	• 14	**205/70R14**	98(WRXL)	T	6	644	209	C	B	70	2
	14	**195/70R14**	91	H	6	630	201	C	B	70	2
	14	**185/70R14**	88	H	5.5	616	189	E	B	70	2
	14	**175/70R14**	88(XL)	H	5	602	177	C	B	70	2
	14	**165/70R14**	81	T	5	589	170	E	B	70	2
	14	**165/70R14**	85(XL)	T	5	588	170	C	B	70	2
	13	**185/70R13**	86	H	5.5	590	189	C	B	70	2
	13	**175/70R13**	82	T	5	576	177	E	B	70	2
	13	**165/70R13**	79	T	5	562	170	E	B	70	2
	13	**165/70R13**	83(XL)	T	5	562	170	C	B	70	2
	13	**155/70R13**	75	T	4.5	548	157	E	B	70	2
	12	**165/70R12**	77	T	5	537	170	E	B	70	2
	12	**145/70R12**	69	T	4.5	509	150	E	B	70	2
80'	15	**175/80R15**	90	S	5	661	177	E	B	70	2
	15	**165/80R15**	87	T	4.5	645	165	C	B	70	2
	• 15	**165/80R15**	87(WR)	T	4.5	645	165	E	B	70	2
	15	**145R15**	77	T	4	615	145	E	C	70	2
	15	**135R15**	73	T	3.5	597	133	E	C	70	2
	14	**185/80R14**	91	T	5	652	184	C	B	70	2
	14	**175/80R14**	88	H	5	636	177	E	B	70	2
	14	**155/80R14**	81	T	4.5	604	157	E	B	70	2
	13	**165/80R13**	87(XL)	T	4.5	594	165	C	B	70	2
	13	**155/80R13**	79	T	4.5	578	157	E	B	70	2
	12	**145/80R12**	74	T	4	537	145	E	B	70	2
	12	**135/80R12**	68	S	3.5	521	133			N/A	

N/A = Values are not available at the time of publication.
• WR = White Ribbon

ECO-2+

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Fuel Efficiency | Comfort | Low Noise

TAIWAN EXCELLENCE 2013

ECO-2+ Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
40'	19	**255/40ZR19**	100(XL)	Y	9	687	260	C	B	73	2
	18	**245/40ZR18**	97(XL)	Y	8.5	653	248	E	B	72	2
	18	**245/40R18**	97(XL)	H	8.5	653	248	E	B	72	2
	18	**235/40ZR18**	95(XL)	W	8.5	645	241	C	B	72	2
	18	**235/40R18**	95(XL)	H	8.5	645	241	E	B	72	2
	18	**225/40ZR18**	92(XL)	W	8	637	230	E	B	72	2
	18	**225/40R18**	92(XL)	H	8	637	230	E	B	72	2
45'	19	**275/45ZR19**	108(XL)	Y	9	731	273	C	B	73	2
	19	**255/45ZR19**	104(XL)	Y	8.5	713	255	C	B	73	2
	19	**245/45ZR19**	102(XL)	Y	8	703	243	C	B	72	2
	19	**235/45ZR19**	95	Y	8	695	236	C	B	71	2
	18	**225/45ZR18**	95(XL)	W	7.5	659	225	C	B	72	2
	18	**225/45R18**	95(XL)	H	7.5	659	225	E	B	72	2
	18	**215/45ZR18**	93(XL)	W	7	651	213	C	B	72	2
	18	**215/45R18**	93(XL)	H	7	651	213	E	B	72	2
	17	**225/45ZR17**	94(XL)	W	7.5	634	225	E	B	72	2
	17	**225/45ZR17**	94(XL)	Y	7.5	634	225	E	B	72	2
	17	**225/45R17**	94(XL)	V	7.5	634	225	E	B	72	2
	17	**215/45R17**	91(XL)	V	7	626	213	E	B	72	2
	16	**205/45ZR16**	87(XL)	W	7	590	206	C	B	72	2
50'	19	**235/50ZR19**	99	W	7.5	719	245	E	B	71	2
	18	**245/50ZR18**	100	W	7.5	703	253	E	B	71	2
	18	**245/50R18**	100	H	7.5	703	253	E	B	71	2
	18	**235/50ZR18**	101(XL)	Y	7.5	693	245	C	B	72	2
	18	**235/50R18**	101(XL)	H	7.5	693	245	E	B	72	2
	16	**205/50R16**	87	V	6.5	612	214	C	B	71	2
	15	**165/50R15**	72	V	5	547	170			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL			
								RRC	Wet Grip	Noise Value (dB)	Noise Class
55'	19	**235/55R19**	105(XL)	V	7.5	741	245	E	B	72	2
	18	**235/55R18**	104(XL)	V	7.5	715	245	C	B	72	2
	17	**215/55R17**	98(XL)	V	7	668	226	C	B	72	2
	16	**205/55R16**	91	V	6.5	632	214	E	B	71	2
	16	**205/55R16**	94(XL)	V	6.5	632	214	E	B	72	2
	16	**195/55R16**	87	V	6	620	201	E	B	71	2
	16	**185/55R16**	87(XL)	V	6	610	194	C	B	71	2
	15	**185/55R15**	86(XL)	V	6	585	194	E	B	71	2
	14	**165/55R14**	72	V	5	538	170			N/A	
60'	18	**235/60R18**	107(XL)	V	7	739	240	E	B	72	2
	17	**225/60R17**	99	H	6.5	702	228	E	B	71	2
	17	**215/60R17**	96	H	6.5	690	221	E	B	71	2
	16	**225/60R16**	98	V	6.5	676	228	C	B	71	2
	16	**215/60R16**	99(XL)	V	6.5	664	221	C	B	72	2
	16	**205/60R16**	96(XL)	V	6	652	209	E	B	72	2
	16	**205/60R16**	96(XL)	H	6	652	209	E	B	72	2
	16	**195/60R16**	89	H	6	640	201	E	B	71	2
	16	**185/60R16**	86	H	5.5	628	189	E	B	70	2
	•15	**165/60R15**	77(WS)	H	5	579	170			N/A	
	15	**165/60R15**	77	H	5	579	170	E	B	70	2
	13	**155/60R13**	70	H	4.5	516	157			N/A	
	12	**165/60R12**	75(XL)	H	5	503	170	E	B	70	2
	12	**165/60R12**	71	H	5	503	170			N/A	
65'	17	**225/65R17**	102	V	6.5	724	228	E	B	71	2
	16	**195/65R16**	92	V	6	660	201	E	B	71	2
	15	**205/65R15**	95	H	6	647	209	E	B	71	2
	15	**195/65R15**	91	H	6	635	201	E	B	71	2
	15	**185/65R15**	88	H	5.5	621	189	E	B	70	2
	15	**175/65R15**	88(XL)	H	5	609	177	E	B	71	2
70'	13	**145/70R13**	71	T	4.5	534	150	E	B	70	2
80'	13	**135/80R13**	70	T	3.5	546	133	E	B	70	2

N/A = Values are not available at the time of publication.
• WS = White Sidewall

Rollnex

NANKANG

SP-9

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Low Noise | Tread Life

TAIWAN EXCELLENCE 2019

SP-9 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
30'	21	**295/35ZR21**	107(XL)	W	0	0	0	E	B	75	2
	21	**295/35ZR21**	107(XL)	Y	10.5	739	301	C	B	75	2
35'	22	**275/40ZR22**	108(XL)	Y	9.5	779	278	C	B	73	2
	22	**265/40ZR22**	106(XL)	Y	9.5	771	271	C	B	73	2
	22	**265/40R22**	106(XL)	V	9.5	771	271			N/A	
	21	**295/40ZR21**	111(XL)	W	10.5	769	301	C	B	75	2
	21	**285/40ZR21**	109(XL)	Y	10	761	290	C	B	75	2
	21	**275/40ZR21**	107(XL)	Y	9.5	753	276	C	B	73	2
	21	**265/40ZR21**	105(XL)	Y	9.5	745	271	C	B	73	2
	20	**285/40ZR20**	108(XL)	Y	10	736	290			N/A	
	20	**235/40ZR20**	96(XL)	Y	8.5	696	241	C	B	72	2
	16	**205/40R16**	83(XL)	V	7.5	570	212			N/A	
45'	21	**285/45ZR21**	113(XL)	Y	9.5	789	285			N/A	
	21	**275/45ZR21**	110(XL)	Y	9	781	273	C	B	73	2
	21	**275/45ZR21**	110(XL)	W	9	781	273	C	B	73	2
	21	**265/45R21**	104	V	9	771	266			N/A	
	21	**255/45ZR21**	105(XL)	W	8.5	763	255	C	B	72	2
	20	**285/45ZR20**	112(XL)	Y	9.5	764	285	C	B	75	2
	20	**275/45ZR20**	110(XL)	Y	9	756	273	C	B	73	2
	20	**275/45R20**	110(XL)	V	9	756	273	C	B	73	2
	20	**265/45ZR20**	108(XL)	Y	9	746	266	C	B	73	2
	20	**265/45R20**	108(XL)	V	9	746	266			N/A	
	20	**255/45ZR20**	105(XL)	W	8.5	738	255	C	B	72	2
	19	**255/45ZR19**	104(XL)	W	8.5	713	255	C	B	72	2
	16	**225/45ZR16**	89	W	7.5	608	225			N/A	
	16	**215/45R16**	90(XL)	V	7	600	213			N/A	
	16	**195/45R16**	84(XL)	V	6.5	582	195			N/A	
	15	**185/45R15**	75	V	6	547	183			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
50'	21	**275/50ZR21**	113(XL)	W	8.5	809	284	C	B	73	2
	20	**285/50R20**	116(XL)	V	9	794	297	C	B	75	2
	20	**275/50ZR20**	113(XL)	W	8.5	784	284	C	B	73	2
	20	**275/50R20**	113(XL)	H	8.5	784	284			N/A	
	20	**265/50R20**	111(XL)	V	8.5	774	277	C	B	73	2
	20	**255/50ZR20**	109(XL)	Y	8	764	265	C	B	72	2
	20	**255/50R20**	109(XL)	V	8	764	265	C	B	73	2
	20	**245/50R20**	102	V	7.5	754	253	C	B	71	2
	19	**265/50ZR19**	110(XL)	Y	8.5	749	277	C	B	72	2
	19	**265/50R19**	110(XL)	H	8.5	749	277	E	B	73	2
	19	**255/50ZR19**	107(XL)	Y	8	739	263	C	B	73	2
	19	**255/50R19**	107(XL)	V	8	739	265	E	B	73	2
	19	**245/50ZR19**	105(XL)	W	7.5	729	253			N/A	
	19	**235/50ZR19**	103(XL)	W	7.5	719	245	C	B	72	2
	19	**235/50R19**	99	V	7.5	719	245			N/A	
	18	**235/50R18**	101(XL)	V	7.5	693	245	C	B	72	2
	18	**225/50ZR18**	95	W	7	683	233	E	B	71	2
	18	**225/50R18**	95	V	7	683	233			N/A	
	18	**215/50ZR18**	92	W	7	673	226	E	B	71	2
	17	**225/50R17**	98(XL)	V	7	658	233			N/A	
	17	**215/50R17**	95(XL)	V	7	648	226			N/A	
	17	**205/50R17**	93(XL)	V	6.5	638	214			N/A	
	16	**225/50R16**	92	V	7	632	233			N/A	
	16	**195/50R16**	88(XL)	V	6	602	201			N/A	
	15	**P295/50R15**	108(WL)	H	9.5	677	297			N/A	
	15	**265/50R15**	99(WL)	S	8.5	647	277			N/A	
	15	**205/50R15**	86	V	6.5	587	214			N/A	
	15	**195/50R15**	82	H	6	577	201			N/A	
	15	**175/50R15**	75	H	5.5	557	182			N/A	

SP-9 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
55'	20	**255/55ZR20**	110(XL)	Y	8	788	265	C	B	73	2
	20	**235/55R20**	105(XL)	V	7.5	766	245	C	B	72	2
	19	**275/55R19**	111	V	8.5	785	284			N/A	
	19	**265/55ZR19**	113(XL)	Y	8.5	775	277	C	B	73	2
	19	**255/55ZR19**	111(XL)	Y	8	763	265	C	B	73	2
	19	**255/55R19**	111(XL)	V	8	763	265	C	B	73	2
	19	**245/55R19**	107(XL)	H	7.5	753	253	C	B	72	2
	19	**235/55ZR19**	105(XL)	W	7.5	741	245	C	B	72	2
	19	**235/55R19**	105(XL)	V	7.5	741	245	E	B	72	2
	19	**225/55ZR19**	99	Y	7	731	233	C	B	71	2
	19	**225/55R19**	99	V	7	731	233			N/A	
	19	**205/55R19**	97(XL)	V	6.5	709	214			N/A	
	18	**255/55R18**	109(XL)	V	8	737	265	C	B	73	2
	18	**235/55R18**	104(XL)	V	7.5	715	245	C	B	72	2
	18	**225/55R18**	98	V	7	705	233	C	B	71	2
	18	**215/55R18**	99(XL)	V	7	693	226	C	B	72	2
	17	**275/55R17**	109	V	8.5	734	284	C	B	72	2
	17	**235/55R17**	99	V	7.5	690	245			N/A	
	17	**235/55R17**	103(XL)	V		690	245	C	B	72	2
	17	**225/55R17**	101(XL)	V	7	680	233			N/A	
	17	**215/55R17**	98(XL)	V	7	668	226	C	B	72	2
	16	**205/55R16**	91	H	6.5	632	214	E	B	70	2
	16	**195/55R16**	87	V	6	620	201			N/A	
	15	**205/55R15**	88	V	6.5	607	214			N/A	
	15	**195/55R15**	85	V	6	595	201			N/A	
	15	**185/55R15**	82	V	6	585	194			N/A	
60'	19	**255/60R19**	109	V	7.5	789	260	C	B	72	2
	18	**285/60R18**	116	H	8.5	799	292	C	B	74	2
	18	**275/60R18**	113	H	8	787	279			N/A	
	18	**265/60R18**	110	H	8	775	272	C	B	72	2
	18	**255/60ZR18**	112(XL)	W	7.5	763	255			N/A	
	18	**255/60R18**	112(XL)	V	7.5	763	260			N/A	
	18	**245/60R18**	105	V	7	751	248	C	B	71	2
	18	**245/60R18**	105	H	7	751	248			N/A	
	18	**235/60R18**	107(XL)	V	7	739	240	C	B	72	2
	18	**225/60R18**	104(XL)	V	6.5	727	228	C	B	72	2
	18	**225/60R18**	100	H	6.5	727	228			N/A	
	17	**255/60R17**	110(XL)	V	7.5	738	260			N/A	
	17	**235/60R17**	102	V	7	714	240	C	B	71	2
	17	**225/60R17**	99	V	6.5	702	228	C	B	71	2
	17	**225/60R17**	99	H	6.5	702	228			N/A	
	17	**215/60R17**	96	H	6.5	690	221	C	B	71	2
	16	**235/60R16**	100	V	7	688	240	C	B	71	2
	16	**225/60R16**	98	V	6.5	676	228			N/A	
	16	**215/60R16**	99(XL)	V	6.5	664	221	C	B	72	2
	16	**205/60R16**	96(XL)	V	6	652	209	C	B	72	2
	16	**175/60R16**	82	H	5	616	177	E	C	70	2
	15	**235/60R15**	98(WL)	S	7	663	240			N/A	
	15	**235/60R15**	98	S	7	663	240	E	B	71	2
	15	**225/60R15**	96	V	6.5	651	228	E	B	71	2
	15	**215/60R15**	94	H	6.5	639	221	E	B	71	2
	15	**205/60R15**	91	H	6	627	209	E	B	70	2
	15	**195/60R15**	88	V	6	615	201	E	B	71	2
	15	**195/60R15**	88	H	6	615	201	E	B	71	2
	15	**185/60R15**	88(XL)	H	5.5	603	189	E	B	71	2
	14	**205/60R14**	88	H	6	602	209	E	B	71	2
	14	**195/60R14**	86	H	6	590	201	E	B	71	2
	14	**185/60R14**	82	H	5.5	578	189	E	C	70	2
	13	**205/60R13**	86	H	6	576	209	E	B	71	2
	13	**185/60R13**	80	H	5.5	552	189			N/A	
	13	**175/60R13**	77	H	5	540	177			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
65'	18	**275/65R18**	116	H	8	815	279			N/A	
	18	**265/65R18**	114	H	8	801	272			N/A	
	18	**255/65R18**	111	H	7.5	789	260	C	B	72	2
	18	**235/65R18**	106	V	7	763	240	C	B	72	3
	18	**235/65R18**	106	H	7	763	240	E	B	71	2
	17	**285/65R17**	116	V	8.5	802	292	C	B	74	2
	17	**265/65R17**	112	H	8	776	272	C	B	72	2
	17	**245/65R17**	111(XL)	H	7	750	248	C	B	72	2
	17	**235/65R17**	108(XL)	V	7	738	240	C	B	72	2
	17	**225/65R17**	102	V	6.5	724	228	C	B	71	2
	17	**215/65R17**	99	V	6.5	712	221	C	B	71	2
	16	**255/65R16**	109	H	7.5	738	260	C	B	72	2
	16	**235/65R16**	107(XL)	V	7	712	240	C	B	72	2
	16	**225/65R16**	100	H	6.5	698	228			N/A	
	16	**215/65R16**	102(XL)	H	6.5	686	221	C	B	72	2
	16	**215/65R16**	102(XL)	V	6.5	686	221	C	B	72	2
	16	**205/65R16**	95	H	6	672	209			N/A	
	16	**195/65R16**	92	H	6	660	201			N/A	
	15	**215/65R15**	96	H	6.5	661	221			N/A	
	15	**205/65R15**	99(XL)	V	6	647	209	C	B	72	2
	15	**205/65R15**	99(XL)	H	6	647	209	C	B	72	2
	15	**205/65R15**	95	H	6	647	209			N/A	
	15	**195/65R15**	91	V	6	635	201	E	B	71	2
	15	**195/65R15**	91	H	6	635	201			N/A	
	15	**185/65R15**	92(XL)	H	5.5	621	189	E	C	71	2
	15	**185/65R15**	88	H	5.5	621	189			N/A	
	15	**175/65R15**	88(XL)	H	5	609	177	E	C	71	2
	14	**195/65R14**	89	H	6	610	201	E	B	71	2
	14	**185/65R14**	86	H	5.5	596	189	E	C	70	2
	14	**175/65R14**	82	H	5	584	177	E	C	70	2
70'	18	**265/70R18**	116	H	8	829	272			N/A	
	18	**265/70R18**	116	V	8	829	272	C	B	72	2
	18	**255/70R18**	113	H	7.5	815	260			N/A	
	17	**265/70R17**	115	H	8	804	272	C	B	72	2
	17	**245/70R17**	110	H	7	776	248	C	B	71	2
	16	**275/70R16**	114	H	8	792	279			N/A	
	16	**265/70R16**	112	H	8	778	272			N/A	
	16	**235/70R16**	106	H	7	736	240	C	B	71	2
	16	**235/70R16**	106	S	7	736	240			N/A	
	16	**225/70R16**	103	H	6.5	722	228			N/A	
	16	**215/70R16**	100	H	6.5	708	221	C	B	71	2
	16	**205/70R16**	97	H	6	694	209			N/A	
	15	**215/70R15**	98	H	6.5	683	221			N/A	
	15	**205/70R15**	96	H	6	669	209	E	B	71	2
	15	**195/70R15**	92	H	6	655	201			N/A	
	14	**225/70R14**	99(WL)	T	6.5	672	228			N/A	
	14	**195/70R14**	91	H	6	630	201			N/A	
	14	**185/70R14**	88	H	5.5	616	189	E	B	70	2
	14	**175/70R14**	88(XL)	H	5	602	177	E	C	71	2
	13	**185/70R13**	86	H	5.5	590	189			N/A	
	13	**175/70R13**	86(XL)	H	5	576	177			N/A	
75'	15	**235/75R15**	109(XL)	H	6.5	733	235			N/A	

N/A =Values are not available at the time of publication.

AT-5

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Handling | Studdable | Loading

TAIWAN EXCELLENCE 2018

AT-5 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
45'	20	**275/45R20**	110(WL)	S	9	756	273			N/A	
50'	20	**285/50R20**	116(WLXL)	T	9	794	297			N/A	
	20	**285/50R20**	116(XL)	T	9	794	297			N/A	
	20	**265/50R20**	112(WLXL)	T	8.5	774	277			N/A	
	20	**265/50R20**	112(XL)	T	8.5	774	277			N/A	
55'	20	**275/55R20**	117(XL)	T	8.5	810	284			N/A	
	18	**255/55R18**	109(OW)	T	8	737	265			N/A	
	18	**225/55R18**	98(WL)	T	7	705	233			N/A	
60'	20	**275/60R20**	115	T	8	838	279			N/A	
	18	**285/60R18**	116	H	8.5	799	292			N/A	
	18	**285/60R18**	116(WL)	T	8.5	799	292			N/A	
	18	**265/60R18**	110	T	8	775	272			N/A	
	18	**255/60R18**	112(XL)	H	7.5	763	260			N/A	
	18	**265/60R18**	110(WL)	H	8	775	272			N/A	
	18	**235/60R18**	107(OW)	T	7	739	240			N/A	
	17	**235/60R17**	102(OW)	T	7	714	240			N/A	
	16	**235/60R16**	104(XL)	H	7	688	240			N/A	
	16	**205/60R16**	96(WL)	H	6	652	209			N/A	
65'	18	**275/65R18**	116(OW)	T	8	815	279			N/A	
	18	**265/65R18**	114(OW)	T	8	801	272			N/A	
	17	**265/65R17**	112(OW)	T	8	776	272			N/A	
	17	**265/65R17**	112(WL)	T	8	776	272			N/A	
	17	**255/65R17**	114(XL)	T	7.5	764	260			N/A	
	17	**245/65R17**	111(OWXL)	T	7	750	248			N/A	
	17	**235/65R17**	108(XL)	T	7	738	240			N/A	
	15	**195/65R15**	91(WL)	H	6	635	201			N/A	
	15	**175/65R15**	88(WLXL)	H	5	609	177			N/A	
	14	**175/65R14**	82(WL)	H	5	584	177			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
70'	18	**265/70R18**	114(OW)	S	8	829	272			N/A	
	17	**285/70R17**	117	T	8.5	832	292			N/A	
	17	**265/70R17**	115(OW)	T	8	804	272			N/A	
	17	**255/70R17**	112	T	7.5	790	260			N/A	
	17	**245/70R17**	112(OWXL)	T	7	776	248			N/A	
	17	**235/70R17**	109(XL)	T	7	762	240			N/A	
	16	**265/70R16**	112(OW)	T	8	778	272			N/A	
	16	**255/70R16**	112(OW)	S	7.5	764	260			N/A	
	16	**245/70R16**	111(OWXL)	S	7	750	248			N/A	
	15	**265/70R15**	112(OW)	S	8	753	272			N/A	
	14	**185/70R14**	88	H	5.5	616	189			N/A	
75'	16	**265/75R16**	116(OW)	T	7.5	804	267			N/A	
	15	**235/75R15**	109(OWXL)	T	6.5	733	235			N/A	
4WD	*20	**LT305/55R20**	121/118	S	9.5	844	316			N/A	
	*20	**LT295/65R20**	129/126	Q	8.5	893	297			N/A	
	*20	**LT295/60R20**	126/123	R	8.5	862	299			N/A	
	*20	**LT295/55R20**	123/120	S	9.5	832	309			N/A	
	*20	**LT285/60R20**	125/122	R	8.5	850	290			N/A	
	*20	**LT285/55R20**	122/119	S	9	822	297			N/A	
	*20	**LT275/65R20**	126/123(OW)	S	8	866	279			N/A	
	*20	**35*12.50R20LT**	121(OW)	S	10	877	318			N/A	
	*18	**LT295/70R18**	129/126	Q	8.5	871	299			N/A	
	*18	**LT285/75R18**	129/126	Q	8	885	286			N/A	
	18	**LT285/65R18**	121/118(OW)	S	8.5	827	290			N/A	
	*18	**LT275/70R18**	125/122(OW)	R	8	843	279			N/A	
	*18	**LT275/65R18**	123/120(OW)	S	8	815	279			N/A	
	*18	**LT265/70R18**	124/121(OW)	S	8	829	273			N/A	
	*18	**35*12.50R18LT**	123	S	10	877	318			N/A	
	*18	**33*12.50R18LT**	118	Q	10	832	318			N/A	
	17	**LT315/70R17**	121/118	S	9.5	874	323			N/A	
	17	**LT285/75R17**	121/118	S	8	860	286			N/A	
	17	**LT285/70R17**	121/118(OW)	S	8.5	832	292			N/A	
	*17	**LT265/70R17**	121/118(OW)	S	8	804	272			N/A	
	*17	**LT265/65R17**	120/117(OW)	S	8	776	272			N/A	
	*17	**LT245/75R17**	121/118(OW)	S	7	800	248			N/A	
	*17	**LT245/70R17**	119/116(OW)	S	7	776	248			N/A	
	*17	**LT235/80R17**	120/117(OW)	R	6.5	808	235			N/A	
	*17	**37*12.50R17LT**	129	Q	10	928	318			N/A	
	*17	**35*12.50R17LT**	121	S	10	877	318			N/A	
	16	**LT315/75R16**	121/118	S	8.5	878	313			N/A	
	16	**LT285/75R16**	122/119(OW)	S	8	834	286			N/A	
	*16	**LT265/75R16**	123/120(OW)	S	7.5	804	267			N/A	
	*16	**LT245/75R16**	120/116(OW)	S	7	774	248			N/A	
	*16	**LT235/85R16**	120/116(OW)	R	6.5	806	235			N/A	
	*16	**LT225/75R16**	115/112(OW)	S	6	744	223			N/A	
	*16	**LT215/85R16**	115/112	S	6	772	214			N/A	
	15	**LT235/75R15**	104/101(OW)	S	6.5	733	235			N/A	
	15	**33*12.50R15LT**	108(OW)	S	10	826	318			N/A	
	15	**32*11.50R15LT**	113(OW)	S	9	801	290			N/A	
	15	**31*10.50R15LT**	109(OW)	S	8.5	775	268			N/A	
	15	**30*9.50R15LT**	104(OW)	S	7.5	750	240			N/A	
VAN	16	**235/65R16C**	115/113	R	7	712	240			N/A	
	16	**215/65R16C**	109/107(WL)	L	6.5	686	221			N/A	

N/A =Values are not available at the time of publication.
* = 3PLY Sidewall

Rollnex

FT-7

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Handling | Comfort

FT-7 Fuel Efficiency Index



FT-7 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
60'	20	**275/60R20**	115	T	8	838	279	E	E	72	2
	18	**255/60R18**	112(XL)	H	7.5	763	260	E	E	73	2
	14	**P235/60R14**	96(OW)	H	7	638	240			N/A	
65'	18	**275/65R18**	116	T	8	815	279	E	E	72	2
	18	**265/65R18**	114	T	8	801	272	E	E	72	2
	17	**285/65R17**	116(OW)	S	8.5	802	292	E	E	72	2
	17	**275/65R17**	115(OW)	S	8	790	279	E	E	72	2
	17	**265/65R17**	112(OW)	S	8	776	272	E	E	72	2
	17	**255/65R17**	110	H	7.5	764	260	E	E	72	2
	16	**255/65R16**	109(OW)	S	7.5	738	260	E	E	72	2
70'	16	**275/70R16**	114(OW)	S	8	792	279	E	E	72	2
	16	**265/70R16**	112(OW)	S	8	778	272	E	E	72	2
	16	**255/70R16**	111(OW)	S	7.5	764	260	E	E	72	2
	16	**245/70R16**	111(OWXL)	S	7	750	248	E	E	72	2
	16	**235/70R16**	106(OW)	S	7	736	240			N/A	
	16	**235/70R16**	106	S	7	736	240	E	E	71	2
	16	**225/70R16**	103(OW)	S	6.5	722	228	E	E	71	2
	15	**265/70R15**	112	T	8	753	272	E	E	72	2
	15	**205/70R15**	96(OW)	T	6	669	209	E	E	71	2
75'	16	**265/75R16**	116	T	7.5	804	267	E	E	72	2
	15	**235/75R15**	105	H	6.5	733	235			N/A	
	15	**235/75R15**	105	S	6.5	733	235	E	E	71	2
	15	**215/75R15**	100	S	6	703	216	E	E	71	2
	15	**205/75R15**	97	T	5.5	689	203	E	E	71	2
	15	**205/75R15**	99(WLXL)	S	5.5	689	201			N/A	
	14	**205/75R14**	98(WLXL)	S	5.5	664	203			N/A	
80'	16	**205/80R16**	104(OWXL)	T	5.5	734	203	E	E	72	2

NANKANG

Rollnex

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
80'	16	**175/80R16**	91(OW)	S	5	686	177	E	E	70	2
	16	**175/80R16**	91	S	5	686	177	E	E	70	2
	15	**215/80R15**	102(OW)	S	6	725	216	E	E	71	2
	15	**195/80R15**	96	S	5.5	693	196	E	E	71	2
	15	**175/80R15**	90	S	5	661	177	E	E	70	2
4WD	17	**LT315/70R17**	121/118	Q/R	9.5	874	323			N/A	
	* 17	**LT225/70R17**	112/110	S	6.5	748	228			N/A	
	* 16	**LT285/75R16**	126/123	Q	8	834	286			N/A	
	16	**LT265/75R16**	123/120(OW)	R	7.5	804	267	E	B	71	2
	16	**LT265/70R16**	110/107	Q	8	778	272	E	E	72	2
	16	**LT245/75R16**	120/116(OW)	R	7	774	248	E	E	72	2
	16	**LT235/85R16**	120/116(OW)	R	6.5	806	235	E	E	72	2
	* 16	**LT225/75R16**	115/112(OW)	Q	6	744	223	E	E	72	2
	16	**LT185/85R16**	105/103	N	5	721	184			N/A	
	15	**LT235/75R15**	104/101(OW)	S	6.5	733	235	E	E	72	2
	15	**LT215/75R15**	100/97(OW)	S	6	703	216			N/A	
	15	**31*10.50R15LT**	109(OW)	Q/S	8.5	775	268			N/A	
	15	**30* 9.50R15LT**	104(OW)	S	7.5	750	240	E	E	72	2
	14	**LT215/75R14**	98/95	Q	6	678	216	E	E	72	2
	14	**27*8.50R14LT**	95(OW)	S	7	674	218	E	E	72	2
	14	**27*8.50R14LT**	95	S	7	674	218			N/A	
LTR	16	**7.50R16**	114/112	N	6	805	210	E	E	72	2
VAN	16	**205R16C**	110/108(OW)	S	6	736	208	E	E	72	2
	15	**265/50R15C**	101/99(WL)	S	8.5	647	277			N/A	
	15	**255/70R15C**	112/110(OW)	S	7.5	739	260	E	E	72	2
	15	**205/75R15C**	110/108(WL)	S	5.5	689	203			N/A	
	14	**205/75R14C**	109/107(WL)	S	5.5	664	203			N/A	

N/A =Values are not available at the time of publication.
* = 3PLY Sidewall

FT-9

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Loading

TAIWAN EXCELLENCE 2012

FT-9 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
55'	18	**235/55R18**	104(WL)	T	7.5	715	245			N/A	
60'	17	**225/60R17**	99(WL)	T	6.5	702	228			N/A	
	16	**215/60R16**	99(WLXL)	T	6.5	664	221			N/A	
	16	**205/60R16**	96(WLXL)	T	6	652	209			N/A	
	16	**175/60R16**	82(WL)	H	5	616	177			N/A	
	15	**185/60R15**	88(WL)	H	5.5	603	189			N/A	
	15	**185/60R15**	88(XL)	H	5.5	603	189			N/A	
	15	**165/60R15**	77	S	5	579	168			N/A	
	15	**165/60R15**	77(WL)	S	5	579	168			N/A	
65'	17	**245/65R17**	111(WL)	T	7	750	248			N/A	
	17	**225/65R17**	102(WL)	T	6.5	724	228			N/A	
	15	**195/65R15**	91(WL)	T	6	635	201			N/A	
	14	**165/65R14**	79(WL)	S	5	570	170			N/A	
	13	**155/65R13**	73(WL)	S	4.5	532	157			N/A	
70'	16	**225/70R16**	103(WL)	S	6.5	722	228			N/A	
	16	**215/70R16**	100(WL)	T	6.5	708	221			N/A	
80'	16	**205/80R16**	104(WLXL)	T	5.5	734	203			N/A	
	16	**175/80R16**	91(WL)	S	5	686	177			N/A	
4WD	* 18	**LT265/60R18**	119/116	Q	8	775	272			N/A	
	17	**35*12.50R17LT**	119	Q	10	877	318			N/A	
	* 17	**LT265/65R17**	120/117	Q	8	776	272			N/A	
	16	**LT315/75R16**	121(OW)	Q	8.5	878	313			N/A	
	16	**LT285/75R16**	122/119(OW)	M	8	834	286			N/A	
	* 16	**LT265/75R16**	123/120(OW)	N	7.5	804	267			N/A	
	16	**LT265/70R16**	117/114(OW)	Q	8	778	272			N/A	

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
4WD	16	**LT255/70R16**	115/112(OW)	Q	7.5	764	260			N/A	
	* 16	**LT245/75R16**	120/116(OW)	N	7	774	248			N/A	
	* 16	**LT235/85R16**	120/116(OW)	N	6.5	806	235			N/A	
	16	**LT205/80R16**	110/108	Q	5.5	736	197			N/A	
	16	**LT185/85R16**	105/103(WL)	L	5	721	182			N/A	
	16	**LT185/85R16**	105/103	L	5	721	182			N/A	
	15	**LT235/75R15**	104/101(OW)	Q	6.5	733	235			N/A	
	15	**LT215/75R15**	100/97(OW)	Q/ S	6	703	216			N/A	
	* 15	**37*12.50R15LT**	118	L/N	10	928	318			N/A	
	15	**35*12.50R15LT**	113(OW)	Q	10	877	318			N/A	
	15	**33*12.50R15LT**	108(WL)	Q	10	826	318			N/A	
	15	**33*12.50R15LT**	108(OW)	Q	10	826	318			N/A	
	15	**32*11.50R15LT**	113(WL)	Q	9	801	290			N/A	
	15	**32*11.50R15LT**	113(OW)	Q	9	801	290			N/A	
	15	**31*10.50R15LT**	109(WL)	Q	8.5	775	268			N/A	
	15	**31*10.50R15LT**	109(OW)	Q	8.5	775	268			N/A	
	15	**31*10.50R15LT**	109	Q	8.5	775	268			N/A	
	15	**30* 9.50R15LT**	104	Q	7.5	750	240			N/A	
	15	**30* 9.50R15LT**	104(OW)	Q	7.5	750	240			N/A	
	12	**145/80R12LT**	80/78(WL)	N	4	536	145			N/A	
VAN	18	**215/55R18C**	107/105(WL)	L	7	693	226			N/A	
	17	**215/60R17C**	109/107(WL)	R/Q	6.5	690	221			N/A	
	16	**215/65R16C**	109/107(WL)	R/Q	6.5	686	221			N/A	
	15	**225/70R15C**	112/110	S	6.5	697	228			N/A	
	15	**195R15C**	106/104(WL)	N	5.5	690	198			N/A	
	15	**195/80R15C**	107/105(WL)	N	5.5	693	196			N/A	
	14	**195R14C**	106/104	Q	5.5	666	198			N/A	
	14	**185R14C**	102/100	Q	5.5	650	187			N/A	

* = 3PLY Sidewall N/A = Values are not available at the time of publication.

MT-1

NEW

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Loading

MT-1 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
4WD	*20	LT305/55R20	121/118	Q	9.5	844	316			N/A	
	*20	LT275/65R20	126/123	Q	8	866	279			N/A	
	20	LT275/65R20	121/118	Q	8	866	279			N/A	
	*20	35*12.50R20LT	121	Q	10	877	318			N/A	
	*20	33*12.50R20LT	114	Q	10	826	318			N/A	
	*18	LT275/70R18	125/122	Q	8	843	279			N/A	
	18	LT275/70R18	121/118	Q	8	843	279			N/A	
	*18	LT275/65R18	123/120	Q	8	815	279			N/A	
	18	LT275/65R18	119/116	Q	8	815	279			N/A	
	*18	35*12.50R18LT	123	Q	10	877	318			N/A	
	17	LT315/70R17	121/118	Q	9.5	874	323			N/A	
	*17	LT295/70R17	121/118	Q	8.5	846	297			N/A	
	17	LT285/70R17	121/118	Q	8.5	832	292			N/A	
	*17	LT265/70R17	121/118(OW)	Q	8	804	272			N/A	
	17	LT255/75R17	111/108	Q	7	819	253			N/A	
	*17	35*12.50R17LT	121	Q	10	877	318			N/A	
	16	LT315/75R16	121/118(OW)	Q	8.5	878	313			N/A	
	*16	LT305/70R16	124/121(OW)	Q	9	834	311			N/A	
	*16	LT285/75R16	126/123	Q	8	834	286			N/A	
	16	LT285/75R16	116/113	Q	8	834	286			N/A	
	*16	LT265/75R16	123/120(OW)	Q	7.5	804	267			N/A	
	16	LT265/75R16	119/116(OW)	Q	7.5	804	267			N/A	
	*16	LT245/75R16	120/116(OW)	N	7	774	248			N/A	
	*16	LT235/85R16	120/116	Q	6.5	806	235			N/A	
	15	LT235/75R15	104/101(OW)	Q	6.5	733	235			N/A	
	15	35*12.50R15LT	113	Q	10	877	318			N/A	
	15	33*12.50R15LT	108(OW)	Q	10	826	318			N/A	
	15	32*11.50R15LT	113(OW)	Q	9	801	290			N/A	
	15	31*10.50R15LT	109(OW)	Q	8.5	775	268			N/A	
	15	30* 9.50R15LT	104	Q	7.5	750	240			N/A	

* = 3PLY Sidewall N/A = Values are not available at the time of publication.

N-889

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Studdable Loading

N-889 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
60'	15	165/60R15	77(WL)	S	5	579	168			N/A	
4WD	*20	35*12.50R20LT	121(OW)	Q	10	877	318			N/A	
	*18	35*12.50R18LT	123(OW)	Q	10	877	318			N/A	
	17	LT285/70R17	121(OW)	Q	8.5	832	292			N/A	
	17	LT265/70R17	112/109(OW)	Q	8	804	272			N/A	
	*17	LT265/70R17	121/118(OW)	N	8	804	272			N/A	
	17	LT255/75R17	111/108(OW)	Q	7	814	253			N/A	
	*17	LT245/70R17	119/116(OW)	Q	7	776	248			N/A	
	*17	35*12.50R17LT	121(OW)	Q	10	877	318			N/A	
	16	LT315/75R16	121(OW)	Q	8.5	878	313			N/A	
	16	LT305/70R16	118/115(OW)	Q	9	834	311			N/A	
	16	LT285/75R16	122/119(OW)	M	8	834	286			N/A	
	*16	LT265/75R16	123/120(OW)	K	7.5	804	267			N/A	
	16	LT265/75R16	119/116(OW)	N	7.5	804	267			N/A	
	16	LT265/75R16	112/109(OW)	N	7.5	804	267			N/A	
	*16	LT245/75R16	120/116(OW)	N	7	774	248			N/A	
	16	LT245/75R16	108/104(OW)	N	7	774	248			N/A	
	*16	LT235/85R16	120/116(OW)	N	6.5	806	235			N/A	
	15	LT235/75R15	104/101(OW)	Q	6.5	733	235			N/A	
	15	35*12.50R15LT	113(OW)	Q	10	877	318			N/A	
	15	33*12.50R15LT	108(OW)	Q	10	826	318			N/A	
	15	32*11.50R15LT	113(OW)	Q	9	801	290			N/A	
	15	31*10.50R15LT	109(OW)	Q	8.5	775	268			N/A	
	15	30* 9.50R15LT	104(OW)	Q	7.5	750	240			N/A	

* = 3PLY Sidewall N/A = Values are not available at the time of publication.

N-870

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | TRAILER

Loading

Born to Conquer

Designed for Hummer

N-870 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
LTR	*16	37*12.50R16.5	127	M	8.25	928	318			N/A	
	*16	37*12.50R16.5	127	N	9.75	928	315			N/A	

* = 3PLY Sidewall N/A = Values are not available at the time of publication.

NANKANG

CW-25

K-CAR | Sedan | Sport | **VAN** | SUV/CUV | 4X4/LT | LTS | TRAILER

Tread Life | Loading | Handling

CW-25 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
VAN	16	**235/65R16C**	121/119	R	7	712	240			N/A	
	16	**225/75R16C**	121/120	R	6	744	223	C	C	72	2
	16	**195/75R16C**	110/108	N	5.5	698	196	E	C	72	2
	15	**225/70R15C**	116/114	Q	6.5	697	228			N/A	
	15	**225/70R15C**	112/110	S	6.5	697	228	C	C	72	2
	15	**215/70R15C**	109/107	R	6.5	683	221	E	C	72	2
	15	**195R15C**	106/104	R	5.5	690	198	C	C	72	2
	15	**195/80R15C**	107/105	N	5.5	693	196	E	C	72	2
	15	**195/70R15C**	104/102	S	6	655	201	C	C	72	2
	15	**185R15C**	103/102	R	5.5	674	188	C	C	72	2
	15	**185/75R15C**	106/104	N	5	659	184			N/A	
	14	**215R14C**	112/110	R	6	700	218	C	C	72	2
	14	**205R14C**	109/107	R	6	686	208	C	C	72	2
	14	**195R14C**	106/104	S	5.5	666	198	C	C	72	2
	14	**185R14C**	102/100	R	5.5	650	188	C	C	72	2
	14	**185/75R14C**	102/100	P	5	634	184	E	C	72	2
	14	**175R14C**	99/98	R	5	634	178	C	C	72	2
	14	**175/65R14C**	90/88	T	5	584	177	C	C	72	2
	14	**165R14C**	97/95	R	4.5	622	167	C	C	72	2
	14	**165/70R14C**	89/87	T	5	588	170	C	C	72	2
	13	**185R13C**	100/98	Q	5.5	624	188	C	C	72	2
	13	**175R13C**	97/95	Q	5	608	178	C	C	72	2
	13	**165R13C**	94/92	Q	4.5	596	167	C	C	72	2
	13	**155R13C**	91/89	T	4.5	578	157	C	C	72	2
	13	**155R13C**	90/88	R	4.5	578	157	C	C	72	2
	12	**155R12C**	88/86	Q	4.5	550	157	C	C	72	2
	12	**145R12C**	86/84	N	4	544	145	C	C	72	2
	12	**145R12C**	81/79	N	4	541	145	E	C	72	2

N/A =Values are not available at the time of publication.

CW-20

K-CAR | Sedan | Sport | **VAN** | SUV/CUV | 4X4/LT | LTS | TRAILER

Comfort | Tread Life | Loading

CW-20 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
4WD	14	**155/80R14LT**	88/86	N	4.5	603	156			N/A	
VAN	20	**235/45R20C**	115/113	R	8	720	236			N/A	
	18	**235/55R18C**	117/115	R	7.5	715	245	C	C	72	2
	18	**225/50R18C**	109/107	T	7	683	233	E	E	72	2
	18	**225/50R18C**	107/105	T	7	683	233	E	E	72	2
	18	**215/55R18C**	109/107	N	7	693	226	E	E	72	2
	17	**235/60R17C**	117/115	R	7	714	240	C	C	72	2
	17	**225/55R17C**	109/107	H	7	680	233	E	C	72	2
	17	**215/60R17C**	109/107	T	6.5	690	221	C	C	72	2
	16	**235/65R16C**	121/119	R	7	712	240	C	C	72	2
	16	**235/65R16C**	115/113	R	7	712	240	C	C	72	2
	16	**225/65R16C**	112/110	S	6.5	698	228	C	C	72	2
	16	**215/75R16C**	116/114	S	6	728	216	C	C	72	2
	16	**215/70R16C**	108/106	T	6.5	708	221	E	C	72	2
	16	**215/65R16C**	109/107	T	6.5	686	221	C	C	72	2
	16	**215/60R16C**	108/106	T	6.5	664	221	C	C	72	2
	16	**205/75R16C**	110/108	R	5.5	714	203	C	C	72	2
	16	**205/65R16C**	107/105	T	6	672	209	C	C	72	2
	16	**195/75R16C**	107/105	R	5.5	698	196	C	C	72	2
	16	**195/75R16C**	110/108	T	5.5	698	196	C	E	72	2
	16	**195/65R16C**	104/102	T	6	660	201	E	C	72	2
	16	**195/60R16C**	99/97	H	6	640	201	E	C	72	2
	16	**185/75R16C**	104/102	R	5	684	184	E	C	72	2
	16	**175/75R16C**	101/99	R	5	668	177	E	C	72	2
	15	**215/70R15C**	109/107	S	6.5	683	221	C	C	72	2
	15	**215/65R15C**	104/102	T	6.5	661	221	E	C	72	2
	15	**205/70R15C**	106/104	S	6	669	209	C	C	72	2
	15	**205/65R15C**	102/100	T	6	647	209	E	C	72	2
	15	**195/80R15C**	107/105(WS)	N	5.5	693	196			N/A	
	14	**205/70R14C**	102/100	P	6	644	209	E	C	72	2
	14	**185/75R14C**	102/100	P	5	634	184	E	C	72	2
	14	**175/70R14C**	95/93	T	5	602	177	C	C	72	2

N/A =Values are not available at the time of publication.

TR-10

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | LTS | **TRAILER**

Tread Life | Loading

TR-10 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
80'	10	**145/80R10**	69	S	4	486	145			N/A	
4WD	13	**145R13LT**	82/80	N	4	569	145			N/A	
VAN	14	**195/70R14C**	104/102	N	6	630	201	E	C	72	2
	14	**185R14C**	104/102	N	5.5	650	188	E	C	72	2
	14	**185/65R14C**	93/91	N	5.5	596	189	E	C	72	2
	13	**195/50R13C**	104/102	N	6	526	201	E	C	72	2
	13	**185/70R13C**	106/104	N	5.5	590	189	E	C	72	2
	12	**195/60R12C**	104/102	N	6	539	201	E	C	72	2
	12	**185/60R12C**	104/101	N	5.5	527	189	E	C	72	2
	12	**155/70R12C**	104/102	N	4.5	523	157	E	C	72	2
	10	**195/55R10C**	98/96	P	6	468	201			N/A	
	10	**145R10C**	84/82	N	4	491	145			N/A	

N/A =Values are not available at the time of publication.

NANKANG

NR-066

K-CAR | Sedan | Sport | **VAN** | SUV/CUV | 4X4/LT | LTS | TRAILER

Loading

NR-066 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
LTR	16	**7.50R16**	121/120	N	6	805	211	E	C	71	2
	16	**7.50R16**	122/120	L	6	805	211			N/A	
	16	**7.00R16**	117/116	N	5.5	777	197	E	C	71	2
	16	**6.50R16**	108/107	N	5.5	750	185	E	B	68	1
	15	**7.50R15**	120/118	N	6	776	211	E	C	71	2
	15	**7.00R15**	114/112	N	5.5	751	197	E	C	71	2
	15	**7.00R15**	111/109	N	5.5	752	197	E	C	71	2
	15	**6.50R15**	103/102	N	5.5	722	187	E	B	68	1
VAN	16	**6.00R16C**	103/101	N	4.5	728	170	E	B	71	2

NANKANG

HA-858

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | **LTS** | TRAILER

Tread Life | Loading

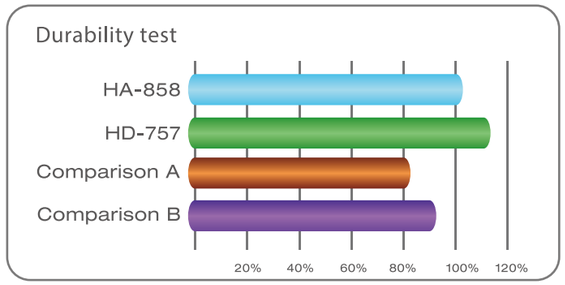

HA-858 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
70'	19	**245/70R19.5**	136/134	J	7.5	839	248	D	C	70	1
75'	17	**235/75R17.5**	132/130	M	6.75	797	233	D	C	70	1
	17	**225/75R17.5**	129/127	M	6.75	783	226	E	C	70	1
	17	**215/75R17.5**	126/124	M	6	767	212	E	C	70	1
	17	**205/75R17.5**	124/122	M	6	753	205	E	C	70	1
80'	17	**225/80R17.5**	123/122	L	6.75	805	226	E	C	70	1
95'	17	**9.5R17.5**	129/127	L	6.75	842	240	E	C	70	1
	17	**8.5R17.5**	121/120	L	6	802	215	E	C	70	1
	16	**8.25R16**	127/125	L	6.5	860	233	E	C	70	1
	16	**8.25R16**	131/129	J	6.5	860	230	E	C	70	1
	16	**7.50R16**	123/122	K	6	805	211	E	C	70	1
4WD	16	**205/85R16**	117/115	N	5.5	754	201			N/A	
	16	**195/85R16**	114/112	N	5.5	738	196			N/A	
	16	**185/85R16**	111/109	N	5	720	182			N/A	
LTR	16	**7.00R16**	117/116	N	5.5	777	197			N/A	
	15	**7.00R15**	114/112	N	5.5	751	197			N/A	

N/A =Values are not available at the time of publication.

HD-757

K-CAR | Sedan | Sport | VAN | SUV/CUV | 4X4/LT | **LTS** | TRAILER

Tread Life | Loading | Handling

HD-757 Size List

Series	Inch	Size	Load Index	Speed Index	Rim Width (Inch)	OD (mm)	SW (mm)	EU TIRE LABEL RRC	Wet Grip	Noise Value (dB)	Noise Class
70'	19	**245/70R19.5**	136/134	J	7.5	839	248	E	C	73	2
75'	17	**235/75R17.5**	132/130	M	6.75	797	233	E	C	73	2
	17	**225/75R17.5**	129/127	M	6.75	783	226	E	C	73	2
	17	**215/75R17.5**	126/124	M	6	767	212	E	C	73	2
	17	**205/75R17.5**	124/122	M	6	753	205	E	C	73	2
80'	17	**225/80R17.5**	123/122	L	6.75	805	226	E	C	73	2
95'	17	**8.5R17.5**	121/120	L	6	802	215	E	C	73	2
	16	**7.50R16**	123/122	K	6	805	211	E	C	73	2
4WD	16	**215/85R16**	120/118	N	6	772	216			N/A	
	16	**205/75R16**	113/111	N	5.5	714	201			N/A	
	16	**205/70R16**	111/109	N	6	694	201			N/A	
	16	**185/85R16**	111/109	N	5	720	182			N/A	

N/A =Values are not available at the time of publication.

Inch up

40 serie → 35 series

40 Series	35 Series
215/40R18	255/35R18
225/40R18	255/35R18
235/40R18	255/35R19
225/40R19	255/35R19 285/35R19
245/40R19	285/35R19

45 series → 40 / 35 series

45 Series	40 Series	35 Series
195/45R16	205/40R17	
205/45R16	215/40R17	
	245/40R17	
205/45R17	255/40R17 215/40R18	
215/45R17	245/40R17 255/40R17 225/40R18 235/40R18	255/35R18
225/45R17	245/40R17 255/40R17 235/40R18	255/35R18
235/45R17	255/40R17 245/40R18 255/40R18	
245/45R17	255/40R18	
215/45R18	235/40R18 245/40R18 255/40R18 225/40R19	255/35R18 255/35R19
235/45R18	255/40R18 245/40R19	285/35R19
225/45R19	245/40R19	255/35R19 285/35R19
245/45R19		285/35R19

50 series → 45 / 40 / 35 series

50 Series	45 Series	40 Series	35 Series
195/50R15	205/45R16		
205/50R15	215/45R16		
165/50R16	195/45R16		
195/50R16	215/45R16 205/45R17		
205/50R16	245/45R16 215/45R17		
215/50R16	245/45R16 225/45R17	245/40R17 255/40R17	255/35R18
225/50R16	245/45R16 235/45R17	255/40R17	255/35R18
205/50R17	225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18	
215/50R17	235/45R17 245/45R17 225/45R18	245/40R17 255/40R17 235/40R18 245/40R18	
225/50R17	245/45R17 235/45R17 245/45R18	255/40R17 255/40R18	
235/50R17	245/45R18		285/35R19
225/50R18	245/45R18	255/40R18	285/35R19
235/50R18	245/45R19		

55 series → 50 / 45 / 40 / 35 series

55 Series	50 Series	45 Series	40 Series	35 Series
165/55R14	165/50R15			
195/55R14	195/50R15 205/50R15			
165/55R15	195/50R15 165/50R16			
175/55R15	195/50R15 205/50R16	195/45R16		
185/55R15	195/50R15 205/50R15 215/50R15 195/50R16	205/45R16		
195/55R15	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16	215/45R16		
205/55R15	215/50R15 225/50R15 205/50R16 215/50R16	245/45R16		
215/55R15	225/50R15 215/50R16 225/50R16	245/45R16	245/40R17	
195/55R16	205/50R16 215/50R16 225/50R16 205/50R17	215/45R16 245/45R16 215/45R17	245/40R17	
205/55R17	215/50R16 225/50R16 245/50R16 205/50R17 215/50R17	215/45R16 225/45R17 235/45R17	245/40R17 255/40R17 235/40R18	255/35R18
215/55R16	225/50R16 245/50R16 215/50R17 225/50R17	245/45R16 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18 245/40R18	
225/55R16	245/50R16 225/50R17 235/50R17	245/45R16 245/45R17	255/40R17 255/40R18	
205/55R17	215/50R17 225/50R17 235/50R17	235/45R17 245/45R17 225/45R18 235/45R18	245/40R17 255/40R17 235/40R18 245/40R18 255/40R18	
215/55R17	225/50R17 235/50R17 225/50R18	235/45R17 245/45R17 235/45R18 245/45R18	255/40R17 245/40R18 255/40R18	
225/55R17	235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18	285/35R19
205/55R18	225/50R18 235/50R18	225/45R18 235/45R18 245/45R18	245/40R18 255/40R18 245/40R19	
215/55R18	225/50R17 235/50R17 245/50R17	245/45R17 255/45R17 235/45R18	255/40R18 245/40R19	285/35R19
225/55R18	235/50R18	245/45R19		285/35R19

60 series → 55 / 50 / 45 / 40 / 35 series

60 Series	55 Series	50 Series	45 Series	40 Series	35 Series
165/60R14	185/55R14 195/55R14 165/55R15				
175/60R14	175/55R15 185/55R14	195/50R15			
185/60R14	195/55R14 195/55R14	195/50R15 205/50R15	205/45R16		
195/60R14	215/55R15	225/50R15			
155/60R15	165/55R15 175/55R15	195/50R15 165/50R16			
165/60R15	175/55R15 185/55R15	195/50R15 205/50R15	195/45R16 205/45R16		
175/60R15	185/55R15 195/55R15 205/55R15 185/55R16	195/50R15 205/50R15 215/50R15 225/50R15 195/50R16	205/45R16 215/45R16	215/40R17	
185/60R15	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16	215/45R16		
195/60R15	215/55R15 205/55R16 215/55R16	215/50R15 225/50R15 215/50R16 225/50R16	245/45R16	245/40R17	
205/60R15	215/55R16	225/50R15 225/50R16	245/45R16	245/40R17 255/40R17	
215/60R15	225/55R16	245/50R16 245/50R17	245/45R16	255/40R17	
175/60R16	185/55R16 195/55R16 205/55R16	195/50R16 205/50R16 215/50R16 225/50R16	205/45R16 215/45R16 205/45R17 215/45R17	215/40R17 245/40R17	
195/60R16	205/55R16 215/55R16 225/55R16	215/50R16 225/50R16 245/50R16 205/50R17 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17 235/40R18	255/35R18
205/60R16	225/55R16 215/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17 245/40R18	
215/60R16	225/55R17	245/50R16 235/50R17 225/50R18	245/45R17 245/45R18	255/40R18	
225/60R16		245/50R16			285/35R19
205/60R17	225/55R17 215/55R18 225/55R17	225/50R17 235/50R17	245/45R17 235/45R18 245/45R18	255/40R19 245/40R19	
215/60R17	215/55R18 225/55R18	235/50R17 235/50R18	245/45R18		285/35R19
225/60R17	235/55R18				285/35R19

65 series → 60 / 55 / 50 / 45 / 40 / 35

65 Series	60 Series	55 Series	50 Series	45 Series	40 Series	35 Series
155/65R12	165/60R12					
145/65R12	155/60R13 165/60R13	155/55R14				
155/65R13	165/60R13 175/60R13		165/50R15			
165/65R13	175/60R13 185/60R13 195/60R13					
195/65R13	205/60R13					
145/65R14	165/60R14	165/55R14	165/50R15			
165/65R14	165/60R14 175/60R14	185/55R14 195/55R14 165/55R15 175/55R15				
165/65R14	175/60R14 185/60R14 195/60R14	185/55R14 195/55R14 185/55R15	195/50R15 205/50R15	195/45R16		
175/65R14	185/60R14 195/60R14 205/60R14	195/55R14 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16		
185/65R14	195/60R14 205/60R14	205/55R15	215/50R15 225/50R15 205/50R16	215/45R16		
195/65R14	205/60R14 205/60R15	215/55R15	225/50R15 215/50R16			
205/65R14	205/60R15 215/60R15		225/50R15 225/50R16	245/45R16	245/40R17	
215/65R14	215/60R15			245/45R16	255/40R17	
145/65R15	155/60R15 165/60R15	165/55R15 175/55R15	165/50R15 195/50R15 165/50R16			
165/65R15	175/60R15 185/60R15	185/55R15 195/55R15 205/55R15 185/55R16	195/50R15 205/50R15 215/50R15 225/50R15	205/45R16 215/45R16	215/40R17	
175/65R15	185/60R15 195/60R15 205/60R15	195/55R15 205/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16 205/45R17		
185/65R15	195/60R15 205/60R15 215/60R15 195/60R16	215/55R15 205/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17	
195/65R15	205/60R15 215/60R15 205/60R16	215/55R16	225/50R15 225/50R16 245/50R16 215/50R17	245/45R16 235/45R17	245/40R17 255/40R17 235/40R18	
205/65R15	215/60R15 215/60R16	225/55R16	245/50R16 225/50R17	245/45R16 245/45R17	255/40R17	
215/65R15	225/60R16		245/50R16 235/50R17	245/45R18		
205/65R16	215/60R16 225/60R16 235/60R16 215/60R17	225/55R17	245/50R16 235/50R17 225/50R18	245/45R17 245/45R18	255/40R18	
215/65R16	225/60R16 235/60R16 225/60R17		245/50R16			285/35R19
235/65R17	245/60R18					
265/65R17	275/60R18					
225/65R18	245/60R18 265/60R18					

70 series → 65 / 60 / 55 / 50 / 45 / 40 series

70 Series	65 Series	60 Series	55 Series	50 Series	45 Series	40 Series
145/70R12	155/65R12 145/65R13	165/60R12 155/60R13 165/60R13	155/55R14			
155/70R12	155/65R13	165/60R13 175/60R13				
165/70R12	155/65R13	175/60R13 185/60R13 195/60R13	185/55R14			
175/70R12		185/60R13 195/60R13				
145/70R13	155/65R13 165/65R13	165/60R13 175/60R13 185/60R13	165/55R14	165/50R15		
155/70R13	165/65R13 155/65R14	175/60R13 185/60R13 195/60R13 165/60R14	185/55R14 165/55R15			
165/70R13	195/65R13 165/65R14 175/65R14	185/60R13 195/60R13 205/60R13 175/60R14 185/60R14	185/55R14 195/55R14 185/55R15	195/50R15	195/45R16	
175/70R13	195/65R13 175/65R14 185/65R14	195/60R13 205/60R13 185/60R14 195/60R14 185/60R15	195/55R14 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16	
185/70R13	195/65R13 185/65R14 195/65R14	205/60R13 195/60R14 205/60R14 195/60R15	205/55R15	215/50R15 225/50R15 205/50R16	215/45R16	
165/70R14	175/65R14 185/65R14 165/65R15	185/60R14 195/60R14 205/60R14 175/60R15 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15 195/50R16	205/45R16	
175/70R14	185/65R14 195/65R14 205/65R14 175/65R15 185/65R15	195/60R14 205/60R14 185/60R15 195/60R15 205/60R15	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16aa 245/45R16 205/45R17	
185/70R14	195/65R14 205/65R14 215/65R14 185/65R15 195/65R15 205/65R15	205/60R14 195/60R15 205/60R15 215/60R15 195/60R16	215/55R15 205/55R16 215/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17 255/40R17
195/70R14	205/65R14 215/65R14 195/65R15 205/65R15	205/60R15 215/60R15 205/60R16	215/55R16 225/55R16	225/50R15 225/50R16 245/50R16 215/50R17	245/45R16 235/45R17 245/45R17	245/40R17 255/40R17
205/70R14	215/65R14 205/65R15 215/65R15 205/65R16	215/60R15 215/60R16	225/55R16	245/50R16 225/50R17 235/50R17	245/45R16 245/45R17	255/40R17
195/70R15	205/65R15 215/65R15 205/65R16	215/60R15 205/60R16 215/60R16 225/60R16 205/60R17	225/55R16 215/55R17 225/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17 235/45R18	255/40R17 245/40R18 255/40R18
205/70R15	215/65R15 205/65R16 215/65R16	215/60R16 225/60R16 235/60R16 215/60R17	225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18
215/70R15	215/65R16 235/65R16	225/60R16 235/60R16 225/60R17		245/50R16		
225/70R15	235/65R16 225/65R17	235/60R16				
235/70R15	235/65R16 255/65R16					
225/70R15	255/65R16					
265/70R15	265/65R17	265/60R18				
205/70R16	215/65R16 235/65R16 225/65R17	225/60R16 235/60R16 225/60R17	225/55R18 235/55R18	235/50R18		
215/70R16	235/65R16 225/65R17	235/60R16 225/60R17 225/60R18	235/55R18			
255/70R16	235/65R16 255/65R16 235/65R17 225/65R18	245/60R18				
235/70R16	255/65R16					
245/70R16	255/65R16 265/65R17	265/60R18 245/60R19				
255/70R16	255/65R16 265/65R17 275/65R17	265/60R18 275/60R18				
265/70R16	265/65R17 275/65R17	275/60R18				
275/70R16	275/65R17					
245/70R17	265/65R17 275/65R17	265/60R18 275/60R18				

Safety

Choosing a tire and replacement

Follow the original vehicle manufacturer OE rim specifications and discuss with a professional tire shop before making a replacement.
All tires used must be of identical specifications and tread pattern.
Do not mix different models, structures, or sizes of tires, to avoid accidents.
Tires are marked with a direction on the sidewall and are to be installed in that direction.

Correctly use and daily inspection

Tire Pressure

Measure the tire pressure when the tire is cold and inflate to originally specified pressure.

Treadwear Indicator

Minimum tread depth is limited to 1.6mm.
It has▲on the circumference of tire shoulder to specify where treadwear indicators are located.

Caution

Check the tire surface for cracks, pins, metal scraps, glass or anything that may puncture the tire.
Also, check for pebbles stuck in the grooves. If any of the above situations occur,
please go to a professional tire shop for repair.

Do not use a tire with damage through which the underlying fabric or steel belt is visible, to prevent accidents.
Mounting the tire to rim should be following the instruction of direction.
The tires should be rotated according to specifications.
If the tire crown is abnormally worn (damage), please go to a professional tire shops for replacement.
Avoid direct sunlight, rain, oil, and electric sparks in tire storage places.

The tire is made of rubber and will deteriorate after a long period of use, and should be periodically inspected. Nankang doesn't guaranty tire whichever five years off from manufactured date the tires should be inspected regularly by the shop; tire over 5 year-old must be replaced.

Important Precautions for Drivers

Avoid grinding the sidewall against the curb and running over bumpy surfaces to limit damage to the tires.
Avoid sharp cornering, quick stops, and rapid acceleration to prevent accidents from happening.
Keep a safe driving distance and obey the speed limit.
When you feel vibration from the vehicle or steering wheel, inspect the tires or return them to a tire shop for a checkup.

Tire Sidewall
Marketing Descriptions

- **The United States Department of Transportation Safety Standards**

  United States Departmant of Transportation regulation " Federal Motor Vehicle Safety Standards ", the tire must be marked as.

  Manufactured Date

- **Tire marked with DOT indicates**

  a. Registered with U.S. DOT
  b. Passes certification of U.S. DOT regulated safety standards testing

- **Tire Pressure Marking**

  MAX LOAD( ) LBSat ( )PSI MAX. PRESSURE
  (Example) When inflation pressure is 36PSI (max), the maximum load is 1135 LBS.
  Note: The maximum tire load and inflation pressure for a cold tire.
  Note: During normal use, please follow the marked inflation pressure on the tire. Do not exceed the maximum pressure.

- **Actual number of plies**

  PLIES: SIDEWALL POLYESTER X
  TREAD POLYESTER X+STELL X+NYLON X

EUROPEAN TIRE LABEL



All new tires, produced after 1st July 2012, and to be sold at point of sale in EU countries after 1st November 2012; must follow EC NO 1222/2009 labeling criteria, and should be labeled with stickers to give the information.
The aim is to improve driving safety, fuel efficiency, and lower noise levels. This regulation allows consumers to make more informed choices when purchasing tires by considering these ranking.

(Source from ETRMA www.etrma.org/tyres/tyre-labelling)



RRC (Rolling Resistance Coefficient)

Lower rolling resistance contributes to fuel saving and less carbon dioxide emission.
Grade A: most efficiency
Grade G: least efficiency
Choosing grade A the tire consume less fuel and carbon dioxide emission.

Effect may vary among vehicles and driving conditions, but the difference between a G and an A level for a complete set of tires could reduce fuel consumption by up to 7.5% and even more in case of trucks.



Wet Grip

Wet grip is an important indication for tire performance on wet road braking distance.
Grade A: the shortest distance
Grade G: the longest distance
Choosing grade A indicates the tire could be shorter 30% braking distance than Grade G.

Effect may vary among vehicles and driving conditions, but in the case of full braking, the difference between a G and an A level for a set of four identical tires could be up to 30% shorter braking distance (e.g. for a typical passenger car driving at 80 km/h speed, this could be up to 18m shorter braking distance)

External rolling noise classes

The external rolling noise is measured and declared in decibels (dB), and indicated in three levels. More black bars mean the tires create more noise.

NANKANG

Passenger car rim width regulations

approved by ETRTO - 2020

Tyre Size	sizes	From Rim Size	To Rim Size
30 series			
215/30	R20	7J	8J
225/30	R19 , 20	7.5J	8.5J
235/30	R20	8J	9J
245/30	R19 , 20	8J	9J
255/30	R19 , 20 , 21 , 22	8.5J	9.5J
265/30	R19 , 20 , 22	9J	10J
275/30	R19 , 20	9J	10J
285/30	R18 , 19 , 20 , 21	9.5J	10.5J
295/30	R19 , 22	10J	11J
305/30	R19	10.5J	11.5J
35 series			
165/35	R17 , 18	5.5J	6.5J
185/35	R17	6J	7J
215/35	R18 , 19	7J	8.5J
225/35	R18 , 19 , 20	7.5J	9J
235/35	R19 , 20	8J	9.5J
245/35	R18 , 19 , 20 , 21	8J	9.5J
255/35	R18 , 19 , 20	8.5J	10J
265/35	R18 , 19 , 22	9J	10.5J
275/35	R18 , 19 , 20	9J	11J
285/35	R22	9.5J	11J
295/35	R21 , 24	10J	11.5J
305/35	R24	10J	12J
315/35	R20	10.5J	12.5J
40 series			
165/40	R16 , 17	5.5J	6.5J
195/40	R16 , 17	6.5J	7.5J
205/40	R16 , 17 , 18	7J	8J
215/40	R16 , 17 , 18	7J	8.5J
225/40	R18 , 19	7.5J	9J
235/40	R17 , 18 , 19	8J	9.5J
245/40	R17 , 18 , 19 , 20	8J	9.5J
255/40	R17 , 18 , 19	8.5J	10J
265/40	R18 , 20, 22	9J	10.5J
275/40	R17 , 18 , 19 , 20	9J	11J
285/40	R24	9.5J	11J
295/40	R20 , 24	10J	11.5J
305/40	R22	10J	12J
45 series			
165/45	R15 , 16 , 17	5J	6J
185/45	R15	6J	7J
195/45	R15 , 16 , 17	6J	7.5J
205/45	R 16 , 17	6.5J	7.5J
215/45	R16 , 17 , 18	7J	8J
225/45	R16 , 17 , 18 , 19	7J	8.5J
235/45	R17 , 18 , 19, 20	7.5J	9J
245/45	R16 , 17 , 18 , 19 , 20	7.5J	9J
255/45	R17 , 18 , 19 , 20	8J	9.5J
265/45	R21	8.5J	10J
275/45	R19 , 20	8.5J	10.5J
285/45	R19	9J	10.5J
295/45	R20	9.5J	11J
305/45	R22	9.5J	11.5J
50 series			
165/50	R15 , 16	4.5J	6J
175/50	R13	5J	6J
195/50	R15 , 16	5.5J	7J
205/50	R15 , 16 , 17	5.5J	7.5J
215/50	R17 , 18	6J	7.5J
225/50	R15 , 16 , 17 ,18	6J	8J
235/50	R17 , 18 , 19	6.5J	8.5J
245/50	R18 , 20	7J	8.5J
255/50	R19 , 20	7J	9J
265/50	R20	7.5J	9.5J
285/50	R20	8J	10J
295/50	R15	8J	10.5J
305/50	R20	8.5J	11J
55 series			
155/55	R14	4.5J	5.5J
165/55	R13 , 14	4.5J	6J

Tyre Size	sizes	From Rim Size	To Rim Size
55 series			
175/55	R15 , 16	5J	6J
185/55	R14 , 15 , 16	5J	6.5J
195/55	R15 , 16	5.5J	7J
205/55	R15 , 16 , 17	5.5J	7.5J
215/55	R16 , 17 , 18	6J	7.5J
225/55	R16 , 17 , 18, 19	6J	8J
235/55	R17 , 18 , 19	6.5J	8.5J
255/55	R18 , 19	7J	9J
275/55	R17 , 19	7.5J	9.5J
60 series			
155/60	R15	4.5J	5.5J
165/60	R12 , 14, 15	4.5J	6J
175/60	R13 , 14 , 15 , 16	5J	6J
185/60	R13 , 14 , 15 , 16	5J	6.5J
195/60	R14 , 15 , 16	5.5J	7J
205/60	R13 , 14 , 15 , 16	5.5J	7.5J
215/60	R14 , 15 , 16 , 17	6J	7.5J
225/60	R15 , 16 , 17 , 18	6J	8J
235/60	R16 , 17 , 18	6.5J	8.5J
245/60	R18	7J	8.5J
255/60	R17 , 18	7J	9J
265/60	R18	7.5J	9.5J
275/60	R20	7.5J	9.5J
285/60	R18	8J	10J
65 series			
145/65	R15	4J	5J
155/65	R13 , 14	4.5J	5.5J
165/65	R13 , 14 , 15	4.5J	6J
175/65	R14 , 15	5J	6J
185/65	R14 , 15	5J	6.5J
195/65	R14 , 15 , 16	5.5J	7J
205/65	R15 , 16	5.5J	7.5J
215/65	R15 , 16	6J	7.5J
225/65	R16 , 17 , 18	6J	8J
235/65	R16 , 17	6.5J	8.5J
245/65	R17	7J	8.5J
255/65	R16 , 17	7J	9J
265/65	R17	7.5J	9.5J
70 series			
145/70	R12	3.5J	5J
155/70	R12 , 13	4J	5J
165/70	R12, 13 , 14	4J	5.5J
175/70	R13 , 14	4.5J	6J
185/70	R13 , 14	4.5J	6J
195/70	R14 , 15	5J	6.5J
205/70	R15	5J	7J
215/70	R15 , 16	5.5J	7J
225/70	R15 , 16	6J	7.5J
235/70	R16 , 17	6J	8J
245/70	R16	6.5J	8J
255/70	R16	6.5J	8.5J
265/70	R15 , 16 , 17	7J	9J
275/70	R16	7J	9J
75 series			
175/75	R16	4.5J	6J
185/75	R14, 16	4.5J	6J
195/75	R16	5J	6.5J
205/75	R16	5J	7J
215/75	R16	5.5J	7J
225/75	R16	6J	7.5J
235/75	R15	6J	8J
265/75	R16	7J	9J
80 series			
155/80	R13 , 14	4J	5J
165/80	R13 , 15	4J	5.5J
175/80	R14	4.5J	6J
195/80	R15	5J	6.5J
205/80	R16	5J	7J
215/80	R15 , 16	5.5J	7J
235/80	R16	6J	8J